



# **WIRELESS ANALYTICS 2024**

The First International Conference on Wireless and Telecommunications

ISBN: 978-1-68558-218-0

November 17<sup>th</sup> – 21<sup>st</sup>, 2024

Valencia, Spain

**WIRELESS ANALYTICS 2024 Editors**

Petre Dini, IARIA, USA/EU

# WIRELESS ANALYTICS 2024

## Forward

The First International Conference on Wireless and Telecommunications (WIRELESS ANALYTICS 2024), held on November 17-21, 2024 in Valencia, Spain, inaugurates a series of events dedicated to analyzing solutions and challenges concerning dedicated frameworks, architectures, applications, software/ and hardware, tools and apps, experimental systems, and lessons learned pertaining to the above desiderata.

Wireless systems and telecommunications systems are driven by the increasing integration of technologies and advancements in network connectivity and infrastructure.

The main target of the event is to provide analytics on the state of the art and tendencies considering several aspects related to technology, equipment, energy, processing, and manageability with a large spectrum of services:

- *Technology*: mmWave, IoT, 5G/6G, slicing, smart spectrum sensing, dynamic spectrum allocation, adaptive-energy, wireless powering, etc.
- *Equipment*: Drone-based services, self-vehicular systems, ultra-reliability and low-latency, low-powered devices, wearable devices, etc.
- *Energy and communication*: Energy, energy harvesting, energy storage, signal processing, cognitive communication and monitoring, antennas, etc.
- *Processing*: Big data, optimization, validation, scheduling, testbeds, emergency services, accuracy, resiliency, etc.
- *Manageability*: Reliability, optimization, provisioning, QoS.

We take here the opportunity to warmly thank all the members of the WIRELESS ANALYTICS 2024 technical program committee as well as the numerous reviewers. The creation of such a broad and high quality conference program would not have been possible without their involvement. We also kindly thank all the authors that dedicated much of their time and efforts to contribute to the WIRELESS ANALYTICS 2024. We truly believe that thanks to all these efforts, the final conference program consists of top quality contributions.

This event could also not have been a reality without the support of many individuals, organizations and sponsors. We also gratefully thank the members of the WIRELESS ANALYTICS 2024 organizing committee for their help in handling the logistics and for their work that is making this professional meeting a success.

We hope the WIRELESS ANALYTICS 2024 was a successful international forum for the exchange of ideas and results between academia and industry and to promote further progress in wireless systems and telecommunications systems research. We also hope that Valencia provided a pleasant environment during the conference and everyone saved some time for exploring this beautiful city

### **VEHICULAR ANALYTICS 2024 Steering Committee**

Kshirasagar Naik, University of Waterloo, Canada

Ioakeim K. Samaras, Intracom Telecom Software Development Center, Thessaloniki, Greece

**VEHICULAR ANALYTICS 2024 Publicity Committee**

Francisco Javier Díaz Blasco, Universitat Politecnica de Valencia, Spain

Ali Ahmad, Universitat Politecnica de Valencia, Spain

# WIRELESS ANALYTICS 2024

## Committee

### WIRELESS ANALYTICS 2024 Steering Committee

Kshirasagar Naik, University of Waterloo, Canada

Ioakeim K. Samaras, Intracom Telecom Software Development Center, Thessaloniki, Greece

### WIRELESS ANALYTICS 2024 Publicity Chair

Francisco Javier Díaz Blasco, Universitat Politècnica de València, Spain

Ali Ahmad, Universitat Politècnica de València, Spain

### WIRELESS ANALYTICS 2024 Technical Program Committee

Arturs Aboltins, Riga Technical University, Latvia

Iwan Adhicandra, Bakrie University, Indonesia

Nan Cen, Saint Louis University, USA

Bo-Rong Chen, Google LLC, USA

Luca Davoli, University of Parma, Italy

Alireza Ghasempour, University of Applied Science and Technology, Iran

Moez Hizem, Innov'COM / Sup'Com / Carthage University, Tunisia

Xinyue Hu, University of Minnesota, Twin Cities, USA

Muhammad Ikram, Macquarie University, Australia

Michel Kulhandjian, Rice University, USA

Sagar Naik, University of Waterloo, Canada

Vincent Omollo Nyangaresi, Tom Mboya University College, Kenya

Lorena Parra Boronat, Universitat Politècnica de València, Spain

Paulo Pinto, Universidade Nova de Lisboa, Portugal

Abdellatif Rahmoun, Ecole Supérieure en Informatique, Sidi Bel Abbes, Algeria

Ioakeim K. Samaras, Intracom Telecom, Software Development Center, Thessaloniki, Greece

Rui Teng, Qilu Normal University, ChinaA

## Copyright Information

For your reference, this is the text governing the copyright release for material published by IARIA.

The copyright release is a transfer of publication rights, which allows IARIA and its partners to drive the dissemination of the published material. This allows IARIA to give articles increased visibility via distribution, inclusion in libraries, and arrangements for submission to indexes.

I, the undersigned, declare that the article is original, and that I represent the authors of this article in the copyright release matters. If this work has been done as work-for-hire, I have obtained all necessary clearances to execute a copyright release. I hereby irrevocably transfer exclusive copyright for this material to IARIA. I give IARIA permission to reproduce the work in any media format such as, but not limited to, print, digital, or electronic. I give IARIA permission to distribute the materials without restriction to any institutions or individuals. I give IARIA permission to submit the work for inclusion in article repositories as IARIA sees fit.

I, the undersigned, declare that to the best of my knowledge, the article does not contain libelous or otherwise unlawful contents or invading the right of privacy or infringing on a proprietary right.

Following the copyright release, any circulated version of the article must bear the copyright notice and any header and footer information that IARIA applies to the published article.

IARIA grants royalty-free permission to the authors to disseminate the work, under the above provisions, for any academic, commercial, or industrial use. IARIA grants royalty-free permission to any individuals or institutions to make the article available electronically, online, or in print.

IARIA acknowledges that rights to any algorithm, process, procedure, apparatus, or articles of manufacture remain with the authors and their employers.

I, the undersigned, understand that IARIA will not be liable, in contract, tort (including, without limitation, negligence), pre-contract or other representations (other than fraudulent misrepresentations) or otherwise in connection with the publication of my work.

Exception to the above is made for work-for-hire performed while employed by the government. In that case, copyright to the material remains with the said government. The rightful owners (authors and government entity) grant unlimited and unrestricted permission to IARIA, IARIA's contractors, and IARIA's partners to further distribute the work.

## Table of Contents

Reducing Frame Synchronization Loss through Optimized Start Frame Delimiter  
*Deyuku Maeda and Naoki Morita*

1

# Reducing Frame Synchronization Loss through Optimized Start Frame Delimiter

Deyuku Maeda

Tokai University Graduate School  
School of Information and Telecommunication Engineering  
Tokyo, Japan  
e-mail: maedaduke@gmail.com

Naoki Morita, PhD

Tokai University Graduate School  
School of Information and Telecommunication Engineering  
Tokyo, Japan  
e-mail: morita@tokai.ac.jp

**Abstract**—Frame sync loss occurs from noise on the Start Frame Delimiter (SFD), causing data errors and communication inefficiency. This problem impacts the reliability of the communication circuit, needing solutions to lower its frequency. While past studies have addressed it through frame and circuit design, the best SFD solution remains undiscovered. Barker codes offer potential, but the ideal SFD is still unknown. Our simulations assessed noise on the SFD and sync errors, aiming to find the optimal pattern. Results showed reducing SFD occupancy lowers noise risk, with the "1110" pattern being the shortest and most effective in improving sync.

**Keywords**—Frame synchronization; SFD; BarkerCode; Telecommunications.

## I. INTRODUCTION

Frame synchronization is important for packet transmission, especially in a network of cognitive radios [1].

Start Frame Delimiter (SFD) is most important part of the frame synchronization. Frame synchronization is achieved by the transmitter sending a frame in which SFD is injected at the beginning of each transmission data. The receiver detects the arrival of a packet by searching for the SFD, then removes the SFD from the data stream to restore the transmitted message. Therefore, SFD is most important part on the frame synchronization. However, there is an issue where noise superimposed on the SFD causes synchronization failure. This is referred to as frame synchronization loss, and it takes time to resynchronize especially when the SFD is incorrectly detected at the wrong position. It is already clear that frame synchronization loss directly affects the reliability of the entire communication channel circuit [2]. Therefore, solutions and methods to further reduce the frequency of occurrence are required.

The paper is structured as follows: Section II reviews related work on Start Frame Delimiter (SFD) design using Barker codes; Section III outlines the objectives and methodology of this study; Section IV presents the simulation setup, results, and discussion; and Section V concludes the paper with a summary of findings and suggestions for future research.

## II. RELATED WORK

In the past, approaches to the issue of frame synchronization loss have included simulation-based performance evaluations of the time required for recovery [2] and methods involving changes to the frame length [3]. However, the crucial factor in frame synchronization loss lies in the SFD, making its design an important approach as well. One such approach is

the use of Barker codes for SFD design. The Barker sequences serve as a known reference signal that we used for frame synchronization. These sequences have good autocorrelation properties [4]. Diago et al [5] presents the implementation of frame detection algorithm based on the autocorrelation properties of Barker sequences in a digital communication system and simulated results are compared in a real wireless link.

## III. METHODOLOGY

Previous research has made it clear that using Barker codes for SFD is beneficial, but the optimal SFD length has yet to be determined. In our study, we aim to quantitatively clarify the optimal SFD that utilizes the characteristics of Barker codes through simulations and propose an optimal SFD that can mitigate the issue of synchronization loss. If the cause of the frame synchronization loss issue is noise superimposed on the SFD, we hypothesize that reducing the occupancy rate of the SFD within the transmission channel would lower the probability of noise being superimposed on the SFD, thereby reducing the risk of noise superimposition to SFD. However, shortening the SFD length increases the risk of accidental matches with the SFD pattern at incorrect positions. Conversely, lengthening the SFD pattern to make it more complex could also increase the risk of noise superimposition. In this study, we conducted Monte Carlo simulations to evaluate the impact of each Barker code used as the SFD on frame synchronization loss.

## IV. SIMULATION

This section presents the simulation setup and results.

### A. Simulation setup

Table 1 shows all the pattern of Barker code. The outline of the simulation is as follow. The packet frame consists of a randomly generated data section and an SFD inserted at the beginning. The SFD uses a Barker code, and the data section is protected by Forward Error Correction (FEC). The transmission channel is modeled as an Additive White Gaussian Noise (AWGN) channel. The simulation involves sending 1000 packets, with each packet having a data section of 255 bytes plus the length of the SFD. The idling period signal is always set to high, meaning the digital value '1', and thus the '11' pattern in the Barker code will not be used.

TABLE I PATTERNS OF BARKER CODE

Length	Binary-Pattern
2	10/11
3	110
4	1101
4	1110
5	11101
7	1110010
11	11100010010
13	1111100110101

B. Result

Figure 1 shows the reception success rate, where the SFD patterns are indicated in the legend next to the label "Start=". It is observed that there is a difference in the success rate when  $BER10^{-5}$ . Furthermore, SFD patterns of 4 bits and 13 bits demonstrate similar success rates. To confirm the frame synchronization loss caused by noise superimposed on the SFD, we compare the number of times noise was superimposed on the SFD and the number of false SFD detections, as shown in Table 2. For the SFD pattern '110', there were 0 occurrences of noise superimposition on the SFD, while the false detection count was 307. Upon further investigation of the data for this case, it was confirmed that the frame synchronization loss occurred due to noise in sections other than the SFD. The SFD patterns where the number of noise superimpositions on the SFD was greater than or equal to the false detection count were '1110', '11100010010', and '1111100110101'

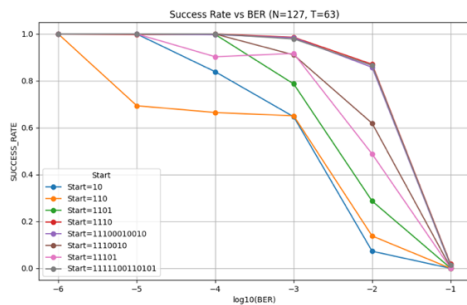


Figure 1. Reception Success Rate

TABLE II NOISE ON SFD AND MISDETECTION

BER	$10^{-5}$	$10^{-4}$	$10^{-3}$	$10^{-2}$
SFD	Noise superimposition number/ Misdetection number			
10	0/0	0/162	2/355	32/932
110	0/307	0/336	4/350	48/864
1101	0/0	1/2	8/212	46/708
1110	0/2	2/0	8/14	47/129
11101	0/0	3/95	10/81	65/502
1110010	0/0	0/0	10/82	79/343
11100010 010	0/0	2/1	11/5	102/54
11111001 10101	0/0	0/0	17/4	141/13

C. Consideration

In this simulation, it was not observed that noise was

superimposed on the SFD in an environment with  $BER10^{-5}$ . On the other hand, the results for the SFD pattern "110" showed that frame synchronization errors occurred even in favorable communication environments. By comparing the number of noise superimpositions on the SFD with the number of false recognitions, it was considered possible to identify the optimal SFD that minimizes the risk of accidental matches. The simulation results revealed that the SFD patterns "1110", "11100010010", and "1111100110101" had a higher number of noise superimpositions than false detections. Additionally, in the environment with  $BER10^{-3}$ , the noise superimposition counts were observed in the order of "1111100110101>11100010010> 1110", suggesting that reducing the occupancy rate of the SFD in the transmission channel can lower the probability of noise superimposition on the SFD. Furthermore, it was confirmed that the false detection rate of the SFD pattern decreases as the SFD length increases. When comparing the number of successful receptions, in the environment with  $BER10^{-3}$ , the results showed "1110>11100010010 >1111100110101". Therefore, the most optimal SFD is "1110", which has the shortest bit length and mitigates synchronization errors while maintaining a high success rate.

V. CONCLUSION AND FUTURE WORK

In this study, simulations were conducted to evaluate the impact of noise superimposition on SFD and frame synchronization errors to identify the optimal SFD pattern. The simulation results revealed that reducing the occupancy rate of the SFD effectively suppresses the probability of noise superimposition. Particularly, the SFD pattern "1110" demonstrated excellent results, being the shortest in bit length while reducing false recognitions and improving frame synchronization success rates. While the optimal SFD was identified in this study, the problem of frame synchronization errors has not been fully resolved. Further research is necessary to explore different approaches to address this issue.

REFERENCES

- [1] R. A. Scholtz, "Frame synchronization techniques," IEEE Trans. Commun., vol. COM-28, no. 8, pp. 1204-1213, Aug. 1980.
- [2] Makino Keigo, "Frame synchronization characteristics evaluation for code errors" ,IEICE General Conference,1996
- [3] Watcharapan Suwansantisuk, "Frame Synchronization for Variable-Length Packets", IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, VOL. 26, NO. 1, JANUARY 2008
- [4] K.-U. Schmidt and J. Willms, "Barker sequences of odd length," [arXiv:1501.06035v1], January, 2015.
- [5] D. Diego Andres Cují, Paul Andres Chasi, Fernando Guerrero, Fredy Rivera, "Frame synchronization through barker codes using SDRs in a real wireless link", 2016 International Conference on Electronics, Communications and Computers ,2016 Februa