

COSMOS Simulator: A Software Tool for Construction-Process Modelling and Simulation

Jirawat Damrianant

Department of Civil Engineering,
Faculty of Engineering, Thammasat School of Engineering,
Thammasat University,
Pathum Thani, Thailand
E-mail: djirawat@engr.tu.ac.th

Sakkaphant Meklersuewong

Department of Civil Engineering,
Faculty of Engineering, Thammasat School of Engineering,
Thammasat University,
Pathum Thani, Thailand
E-mail: sakkaphant@gmail.com

Abstract—Computer simulation software is an essential tool for efficiently simulating complex processes. Construction Oriented Simulation MOdelling System (COSMOS) Simulator is a program developed specifically for simulating models created using COSMOS methodology, a modified Petri Net designed for simulating construction-based operations. However, unlike some existing Petri Net-based simulators, which may require a deep understanding of Petri Net theory, COSMOS is designed to be intuitive and accessible to construction professionals. Although previous studies have used the COSMOS Simulator to simulate various construction processes and documented its accuracy, no published work directly describes the simulator itself. This article aims to provide a detailed description and illustration of the COSMOS Simulator's features, especially its ability to model and simulate specific construction behaviours. This paper offers a resource for researchers and practitioners interested in leveraging COSMOS for their construction modelling and simulation needs.

Keywords—COSMOS; Simulator; Construction; Process; Petri Nets.

I. INTRODUCTION

Process modelling and simulation are valuable approaches for construction engineering. However, a suitable software tool is necessary to simulate complex construction operations. The need for construction simulation software has been driven by the increasing complexity of construction projects and the need for effective planning and resource management tools.

The development of simulation software or systems has been discussed in [1] and summarised as follows. Early systems like the Micro-Computerized CYCLic Operation Network (MicroCYCLONE) and the Dynamic Interface for Simulation of Construction Operations (DISCO) laid the groundwork for the field. Still, their adoption was often limited by the specialised knowledge required to use them. The emergence of object-oriented programming and discrete-event simulation paradigms led to the development of more user-friendly and versatile tools like the Construction Operation Simulation Tool (COST) and the Construction Object Oriented Process Simulation (COOPS)

system. However, the inherent complexity of construction processes, with their inherent uncertainties and dynamic interactions, continued to pose challenges for simulation modelling.

As detailed in this paper, the COSMOS Simulator presents a significant advancement in construction process modelling and simulation. The software can simulate models created using the COSMOS methodology [2], a modified Petri Net designed to facilitate simulation modelling of construction-based operations. The methodology introduces new nodes, arcs, and attributes to capture complex construction behaviours, improving the ease and realism of modelling for simulation and analysis. The article [2] details how these extended elements interact to represent various construction scenarios, showcasing their flexibility in handling the complexities of construction. However, unlike some Petri Net-based simulators that may demand a deep understanding of Petri Net theory, COSMOS is crafted to be easily accessible for construction professionals.

This article addresses a gap in the existing literature by providing a direct and detailed description of the COSMOS Simulator's features and capabilities. While previous studies have utilised the simulator for various construction simulations (some in Thai) [3]-[11], and the software's accuracy has also been confirmed and reported in several articles (some in Thai) [5][7][8][10], a dedicated publication outlining its functionalities was lacking. This paper fills that void. The article offers a detailed description and illustration of the distinctive features of the COSMOS Simulator, notably its capability to model behaviours not typically accessible in other Petri Net simulators, such as [12]-[16]. These features include elements like Header, Follower, Buffer, Pipe, End Arc, and DPA, which can manage continuous processes and dynamically progressive activities commonly encountered in specific construction processes. The COSMOS Simulator's user interface and key components will be described in Section II. A discussion, conclusion, and suggestions for future work will be provided at the end of the article in Sections III and IV.

II. DESCRIPTIONS OF USER INTERFACE AND KEY COMPONENTS

This section will review COSMOS's user interface and explain the essential components of the COSMOS Simulator. Figure 1 displays the homepage of the COSMOS Simulator's user interface, which can be accessed by selecting "Model" in the "view mode selector" panel. It should be noted that the Model mode is pre-selected by default. The system interface comprises several key components: the Menu Bar, Simulation-Run Controller Panel, Simulation Control Bar Properties Palette, Modelling Element Panel, Model Drawing Area, Status Bar, and View Mode Selector. The following subsections will comprehensively describe each of these significant components of the COSMOS Simulator.

A. Menu Bar

The menu bar in Figure 1 is divided into three tabs: Files, Settings, and Help. Each tab contains commands for manipulating files and software settings, such as creating a new file, opening an existing file, saving files, and changing font and grid settings.

B. Simulation-Run Controller Panel

To operate the simulation, users interact with the buttons on the "simulation-run controller panel". This panel contains several buttons as follows;

"Continuous Run" initiates a continuous simulation with animation as transitions fire and tokens move.

"Flash Run" simulates without displaying any animation, only providing the simulation's results unless the user specifies that animation should be shown.

"Pause" temporarily halts the simulation.

"Reset" brings the simulation back to its initial state.

"Previous Step" steps the simulation backwards by one step.

"Previous Event" steps the simulation backwards by one event.

"Next Event" steps the simulation forward by one event.

"Next Step" steps the simulation forward by one step.

See Figure 2 for the locations of these buttons in the user interface.

It is important to note that running the simulation by a step or by an event differs in terms of how the animation displays tokens residing in the places between adjacent transitions. When simulating by an event, the animation does not show tokens temporarily residing in the places, whereas simulating by a step does display these tokens.

C. Simulation Control Bar

Before running a simulation, users can define a seed number in the "Seed" field of the "simulation control bar" (see Figure 1). The specified seed number is the initiator for generating a random number stream using the Linear Congruential Method. This stream is subsequently utilised to generate random samplings, including the firing duration, referred to as 'Service Time' within the COSMOS Simulator. Service time is sometimes stochastic; in such cases, the

generated random numbers are used to determine the service time of the transitions each time they fire. These stochastic durations are governed by Probability Density Functions (PDF) specified by the users (See Figure 3). Additionally, the COSMOS Simulator utilises the stream to determine events for transition firings, whether they will fire or not. The determination is based on the probability ratios associated with transitions set by the users. These transition probabilities can be employed to resolve conflicts among transitions, should they arise.

The control bar offers additional functionalities. The Time Interval field allows users to specify the display frequency of the simulation run. For example, suppose the COSMOS simulation begins at time = 0, and the Time Interval is set to 5 minutes. In that case, the Simulator will visualise the run at 5, 10, 15, 20 minutes, and so on, showcasing the transition's firing and token movement animations at those time intervals. The simulation's speed can be adjusted using the Play Speed slider. Additionally, the Time Limit field allows users to define a specific time at which the simulation will be forced to terminate, even if its natural stopping conditions are not met.

D. Modelling Element Panel

The COSMOS modelling elements are located in the "modelling element panel", as shown in Figure 1. The panel contains various buttons representing different modelling element types, except for the top-left button which serves as the selection mode. Clicking on any of these buttons allows users to enter the mode for placing the selected element type on the "model drawing area." The first four elements in the panel, located next to the selection mode, are the common Petri Nets elements: Token, Place, Transition, and Arc.

1) *Place*: A place element has two primary attributes: capacity and marking. Capacity refers to the maximum number of tokens that can be stored in a place at any given time, whereas marking indicates the current number of tokens present in the place. For instance, consider a Petri Net shown in Figure 1, where place P1 has a capacity of 4 tokens and currently contains one token. The current marking and capacity of the place are denoted by the numbers on the top-right corner as "1/4". A black area resembling a pie chart is used to visually represent the ratio between the marking and the capacity of the place.

2) *Transition*: Transitions in the COSMOS Simulator have several primary attributes that determine their behaviours during the simulation. These attributes include priority, probability, service time, and max firing queue. Figure 1 provides an example of a transition's properties palette (on the right-hand side of the figure), which displays its primary attributes. Priority and probability are used to resolve conflicts among transitions demanding tokens from the same place. Service time is the firing duration of the transition, which can be a constant value or a probability distribution. Users can change the firing duration type by clicking the "Edit" button in the properties palette. Figure 3

shows the properties editor for transition T1, which allows the user to specify the firing duration as a triangular distribution with minimum, mode, and maximum values of 5, 12, and 18 time units, respectively.

The term "max firing queue" refers to the maximum number of times a transition can fire simultaneously. This feature is handy for modelling certain construction behaviours. For example, when two loaders are working together to load three trucks, with each loader handling one truck at a time, there are instances when loading activities for two trucks occur simultaneously or overlap. The "max firing queue" feature can be used in this case.

Consider the initial state of a truck-loading model, as shown in Figure 4. Three trucks are located at P1, while two loaders are stationed at P2. By setting the maximum firing queue to 2, as shown in Figure 5, T1 can fire twice overlappingly. When firing, the number 2 displayed in the middle of T1 indicates that the transition handles two firings simultaneously. If the maximum firing queue were set to 1 (the default value), T1 could only fire once at a time. This scenario would not accurately reflect the real-world situation in which two loaders are available to handle the loading process simultaneously. Finally, the model in Figure 6 represents the circumstances when one truck is still being loaded while another truck has already finished loading. The number 1 displayed in the middle of T1 indicates that only one firing is being handled by T1 at this point in time.

3) *Token and Arc*: Tokens and arcs in the COSMOS Simulator serve the same function as those in common Petri Nets. In the current version of the simulator, all tokens and arcs are black and do not have any additional attributes or colours.

4) *Condition Arc*: Condition arcs in the COSMOS Simulator share similarities with inhibitor arcs found in modified Petri Nets, although substantial disparities exist between them. While the weight on a typical inhibitor arc is fixed at "equals zero," a condition arc possesses the flexibility to adopt any integer value as its weight, thereby enabling the expression of conditions in either equality or inequality formats. For instance, a condition arc's weight can be designated as "greater than or equal to 4." Additional instances illustrating the practical applications of condition arcs can be found in references [5][9] or a brief model delineated in Figure 7.

The model depicted in Figure 7 entails the transportation of 8 pieces of precast elements from a casting plant to a construction site. A loader situated at the plant facilitates the loading of precast elements onto a truck for transportation while also managing the unfinished precast elements within the plant. Nonetheless, the primary emphasis of this operation lies in the transportation of the eight precast elements. Consequently, the simulation of the process necessitates termination upon the completion of transporting the eight elements to the construction site and the subsequent return of the truck to the plant. In this model, a condition arc

with a weight of " ≥ 1 " (greater than or equal to one) is employed to govern the cessation of the process.

These features of condition arcs are handy for modellers who require control over specific logic or conditions in their construction process models. The features allow modellers to make their models more concise.

5) *Header, Follower, Buffer, Pipe, and End Arc*: Specific construction activities can only begin after their respective preceding activities have operated for a designated period. However, the completion of preceding activities is not mandatory before commencing the succeeding ones. When two or more activities share this interdependent relationship, they are classified as overlapping activities. To manage such overlapping activities, the COSMOS Simulator utilises five modelling elements: Header, Follower, Buffer, Pipe, and End Arc. Figure 8 displays the symbols of the five elements in the "modelling element panel" of the COSMOS Simulator.

A header is a unique transition type representing the first activity in a series of overlapping activities. Like a normal transition, it can be enabled and fired (shot). The primary function of a header is to convert discrete units of work into continuous units, represented as a percentage. When a header shoots, it sends portions of the work through pipes and a buffer to the next activity in the series. Additional details regarding the shooting mechanism and the functionality of headers can be found in [3].

A follower can be regarded as a particular type of transition, similar to a header. However, followers represent subsequent activities instead of representing the first activity in a series of overlapping activities. Like headers, followers release portions of continuous work through shootings. The quantity of work released from each shooting of a follower is equal to the shooting percentage specified in the header of the series. The shooting criteria for a follower are the same as those for a normal transition, with the additional condition that the released quantity of work from the preceding element (either a header or another follower) must be available in the input buffer of the follower. Further details on the functionality of followers can be found in [3].

A buffer is a special type of place where portions of the quantity of work released from headers or followers are stored. Buffers are connected to headers or followers via pipes. It's important to note that tokens cannot reside in buffers, and buffers have an unlimited capacity.

A pipe is a particular type of arc used to represent the flow of work released from headers or followers. In other words, pipes are used to send portions of work resulting from shootings of headers or followers. Pipes can only connect headers or followers to buffers and buffers to followers.

The COSMOS Simulator utilises an "end arc" to conclude overlapping series when the shooting percentage of the final follower reaches 100%. Once this threshold is met, the end arc sends a token or tokens to the connected outgoing place, with the number of tokens depending on the

weight of the arc. This mechanism effectively terminates the series and ensures proper execution of the simulation.

Sakkaphant Meklersuewong and Jirawat Damrianant [10] demonstrate the use of the five elements (header, follower, buffer, pipe, and end arc) in a sample application to simulate overlapping activities in a concreting and waste-handling operation.

6) *Dynamically Progressive Activity (DPA)*: Dynamically Progressive Activity (DPA) is defined in COSMOS as an activity whose duration varies due to the increase in the amount of work for each iteration. DPAs commonly occur in linear construction processes such as road construction and drainage pipe installation. For example, in reinforced-concrete road construction, the "moving to placing spot" activity will have a longer duration as the length of the road being constructed increases with each iteration of the placement. This is because the starting point of the placement area remains stationary while the placing spots get further away for each round of the placement. As a result, the distances between the beginning of the placement zone and the placing spots increase, thereby increasing the duration of the "moving to placing spot" activity performed by ready-mixed concrete trucks.

If a DPA's working rate and amount of work are known, its activity duration can be calculated. For instance, in reinforced-concrete road construction, suppose a concrete truck moves between the starting point of the placement area and a placing spot at an average speed of 10 km/hr or 166.67 m/min (this represents the working rate), and the distance between the beginning of the placement zone and the placing spot is 100 m (this represents the amount of work). In this case, the duration required for the truck in the "moving to placing spot" activity will be 0.6 minutes, indicating that, on average, the truck can cover a distance of 100 m within 0.6 minutes. Therefore, for distances of 200 m, 300 m, and 400 m, the truck will require 1.2, 1.8, and 2.4 minutes, respectively, to complete the activity.

After determining the duration of a DPA, users can input this information into the corresponding activity within the COSMOS Simulator. Subsequently, the simulator will calculate the duration of each iteration of the DPA by incrementally advancing the amount of work completed and using these values to simulate the process.

Figure 9 presents a concrete-road placement model, representing an operation similar to the abovementioned process. The model showcases the implementation of the DPA concept. Notably, a DPA element in the COSMOS Simulator is a unique type of transition that features a dynamically progressive firing duration. In the figure, the elements labelled "DPA1-Truck proceeds from the starting point of the placement area to the placing spot" and "DPA2-Truck returns to the starting location of the placement area" represent DPAs. When DPA1 fires for the first time, its firing duration will be zero since a truck can discharge concrete immediately upon reaching the starting point of the

placement area without needing to move further forward. In the subsequent three iterations, the firing durations will be 0.6 minutes, 1.2 minutes, and 1.8 minutes as the placing points for the truck will be located 100 meters, 200 meters, and 300 meters away, respectively, from the beginning of the placement zone.

III. DISCUSSION

Unlike some existing simulators, which may require a deep understanding of Petri Net theory, the COSMOS Simulator is designed to be intuitive and accessible to construction professionals. By incorporating unique modelling elements, COSMOS allows the representation of complex construction behaviours often overlooked in traditional Petri Net simulators. The ability to model overlapping activities, dynamically progressive activities, and resource constraints set the COSMOS Simulator apart, providing a more accurate and realistic simulation environment tailored to the construction industry's specific needs.

Compared to the existing solutions, primarily represented by general-purpose Petri Net simulators, COSMOS demonstrates several advantages. Including construction-specific modelling elements allows the representation of unique construction behaviours. The focus on practical applicability makes COSMOS more accessible to construction professionals compared to simulators with limited construction-specific features. Furthermore, COSMOS's ability to model complex resource management scenarios and dynamic changes in activity durations provides a more comprehensive simulation environment for construction projects.

While COSMOS represents a significant step forward, it is essential to acknowledge its limitations and potential areas for future development. The simulator's primary focus on discrete-event simulation may limit its applicability to continuous processes or systems with complex interactions. Additionally, although COSMOS can simulate dynamic processes, its current version may have limitations in incorporating real-time data from construction sites, which is crucial for achieving a true digital representation of construction processes. Future research and development efforts can focus on expanding COSMOS's capabilities in these areas, further enhancing its value and impact in the construction industry. The current version of the COSMOS Simulator is available online [17].

IV. CONCLUSION AND FUTURE WORK

This paper provided a comprehensive description and illustration of the distinctive features of the COSMOS Simulator, a computer program designed to simulate construction processes effectively. COSMOS accounts for real-world construction behaviours such as:

- Concurrent execution of similar activities through "max firing queue" settings.

- Overlapping or interleaved activities facilitated by headers, followers, buffers, pipes, and end arcs.
- Simulation of Dynamically Progressive Activities (DPAs), where duration varies based on workload, commonly seen in tasks like asphalt paving.

Notably, these modelling elements and features—headers, followers, buffers, pipes, end arcs, and DPAs—are unique to COSMOS, enabling the simulation of specific behaviours found in construction, and they are not available in other simulation tools.

Apart from normal arcs, COSMOS also has condition arcs similar to inhibitor arcs in modified Petri Nets but allow more flexibility. They can have any integer weight, enabling the expression of equality or inequality conditions.

COSMOS has been successfully used to model and simulate various aspects of construction. However, further research is needed to explore the needs and gather feedback from diverse users. This information will be crucial in enhancing the COSMOS system to make it even more effective in simulating construction processes.

This paper offered a resource for researchers and practitioners interested in leveraging COSMOS for their construction modelling and simulation needs.

Despite its emphasis on functionality for construction practitioners, the COSMOS Simulator and its associated methodology can be used to model and simulate any discrete event process.

Future research and development efforts will focus on expanding COSMOS's capabilities to incorporate real-time data from construction sites. Additionally, it would be beneficial to extend COSMOS's capabilities to simulate construction processes with even more complex interactions. The simulation of more complex interactions could be achieved by adding appropriate control statements, enabling users to have finer control over the behaviours of the COSMOS models and aligning them more closely with the actual behaviours of construction work in the fields.

REFERENCES

- [1] B. Visartsakul and J. Damrianant, "A review of BIM and simulation as virtual representations under the Digital Twin concept," *Eng. J.*, vol. 27(1), pp. 11-27, Jan. 2023, doi:10.4186/ej.2023.27.1.11.
- [2] J. Damrianant, "COSMOS: A Discrete-Event Modeling Methodology for Construction Processes," *Int. J. Internet Enterp. Manag.*, vol. 1, pp. 128-152, Apr. 2003, doi:10.1504/IJEM.2003.003209.
- [3] J. Damrianant and R. R. Wakefield, "A Petri Net-Based Methodology for Modelling of Overlapping Activity Processes," *The Second International Conference on Construction Process Re-engineering. CPR-99*, Sydney, 1999, pp. 375-386.
- [4] S. Meklersuewong and J. Damrianant, "Energy Reduction in Road Construction," *The Third International Symposium on Engineering, Energy and Environments (ISEEE-3)*, Bangkok, 2013, pp. 523-532.
- [5] J. Damrianant, "Optimization of Supply Trains in Tunnel Boring Operation Using Tunnel Boring Machines," *The Sixth International Conference on Advances in Civil, Structural and Mechanical Engineering (CSM-18)* Zurich, 2018, pp. 8-12. doi:10.15224/978-1-63248-150-4-23.
- [6] J. Damrianant and T. Panrangsri, "Resource Management Using COSMOS Modeling and Simulation System to Lessen Concrete-Placing Duration," (in Thai) *Thai J. Sci. Tech.*, vol. 7(5), pp. 553-566, Aug. 2018, doi:10.14456/tjst.2018.50.
- [7] N. Suri and J. Damrianant, "Comparing Construction Process Simulation between the Arena and Cosmos Programs," (in Thai). *Eng. J. Research Development*, vol. 30(4), pp. 89-104, Oct. 2019, ISSN: 2730-2733.
- [8] B. Visartsakul and J. Damrianant, "Determining Costs and Time Required for Building Construction by Using 3D Structural Models, Unit Costs, Productivity Rates, and Project Simulations," (in Thai) *Eng. J. Research Development*, vol. 31(4), pp. 63-76, Oct. 2020, ISSN: 2730-2733.
- [9] J. Damrianant, "Track Management Approaches for Underground Tunnel Construction," *Thai J. Sci. Tech.*, vol. 10(5), pp. 621-634, Sep. 2021, ISSN: 2286-7333.
- [10] S. Meklersuewong and J. Damrianant, "Evaluating the COSMOS Software Ecosystem for Domain-Specific Construction Process Simulation," *Int. Rev. Model. Simul.*, vol.15(3), pp. 179-188, Jun. 2022, doi:10.15866/iremos.v15i3.20268.
- [11] J. Damrianant, "Comparison of Process and Project Duration Assessment Approaches for an Industrial Water-System Installation Project Using Estimation Method and COSMOS Program," (in Thai) *J. KMUTNB*, vol. 33(1), pp. 127-139. Jan. 2023, doi:10.14416/j.kmutnb.2022.06.004.
- [12] M. A. Drighiciu and D. C. Cismaru, "Modeling a Water Bottling Line Using Petri Nets," *Annals of the University of Craiova. Electr. Eng. Ser.*, vol. 37, pp. 110-115, 2013, ISSN: 1842-4805.
- [13] M. Herajy, F. Liu, C. Rohr, and M. Heiner, "Snoopy's Hybrid Simulator: A Tool to Construct and Simulate Hybrid Biological Models," *BMC Systems Biology*, vol. 11(71), pp. 1-16, Jul. 2017, doi:10.1186/s12918-017-0449-6
- [14] R. Davidrajuh, D. Krenczyk, and B. Skolud, "Finding Clusters in Petri Nets. An Approach Based on GPenSIM," *Model. Identif. Control*, vol 40(1), pp. 1-10, Jan. 2019, doi:10.4173/mic.2019.1.1.
- [15] E. Kučera, et al., "New Software Tool for Modeling and Control of Discrete-Event and Hybrid Systems Using Timed Interpreted Petri Nets," *Applied Sciences*, vol. 10(15), pp. 5027, Jul. 2020, doi:10.3390/app10155027.
- [16] V. B. Kumbhar1 and M. S. Chavan, "A Review of Petri Net Tools and Recommendations," *Proceedings of the International Conference on Applications of Machine Intelligence and Data Analytics (ICAMIDA 2022)*, ICAMIDA 2022, ACSR 105, May 2023, pp. 710-721, doi:10.2991/978-94-6463-136-4_61.
- [17] COSMOS Simulator. [Online]. Available from: https://drive.google.com/file/d/1qpxEvIq9TDNfynrqT_Wj5VEHGE3uBW53/view?usp=drive_link.

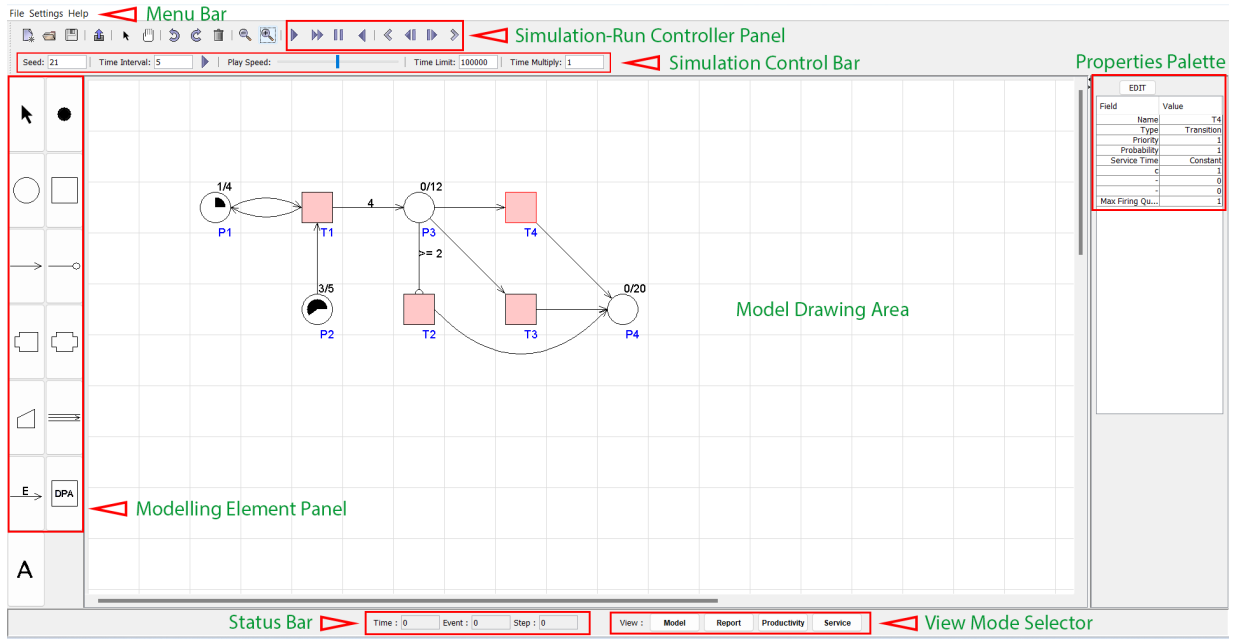


Figure 1. Homepage of COSMOS Simulator's user interface.

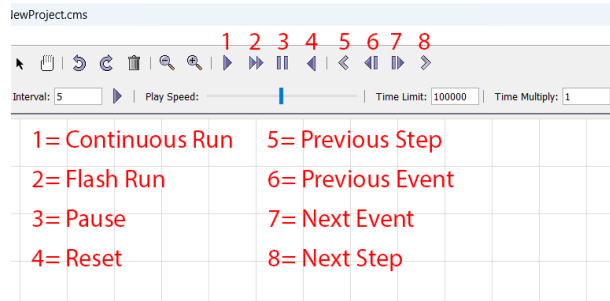


Figure 2. Simulation-Run Controller Panel.

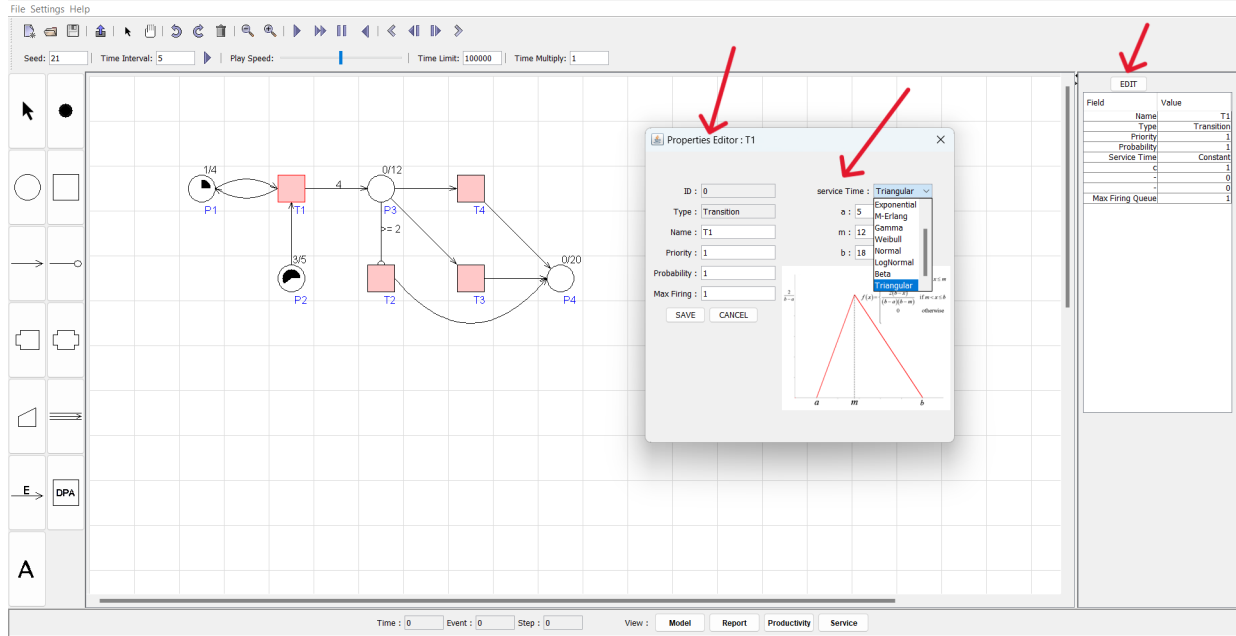


Figure 3. Properties Editor of Transition.

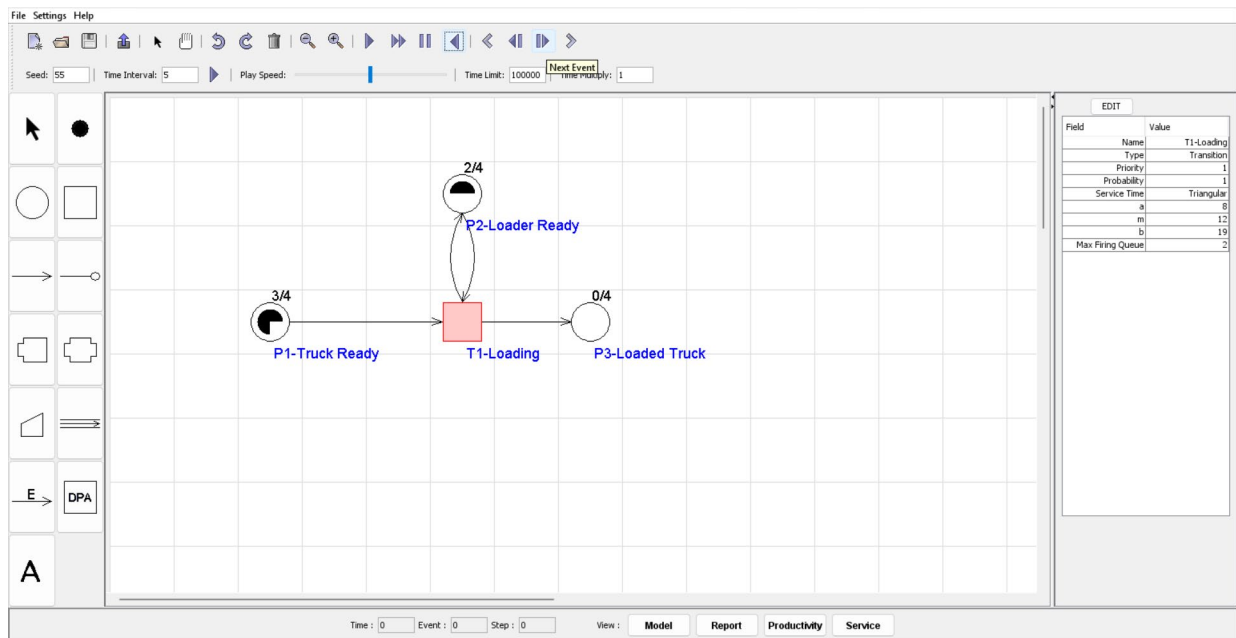


Figure 4. Model illustrating “Max Firing Queue” Feature (State 1).

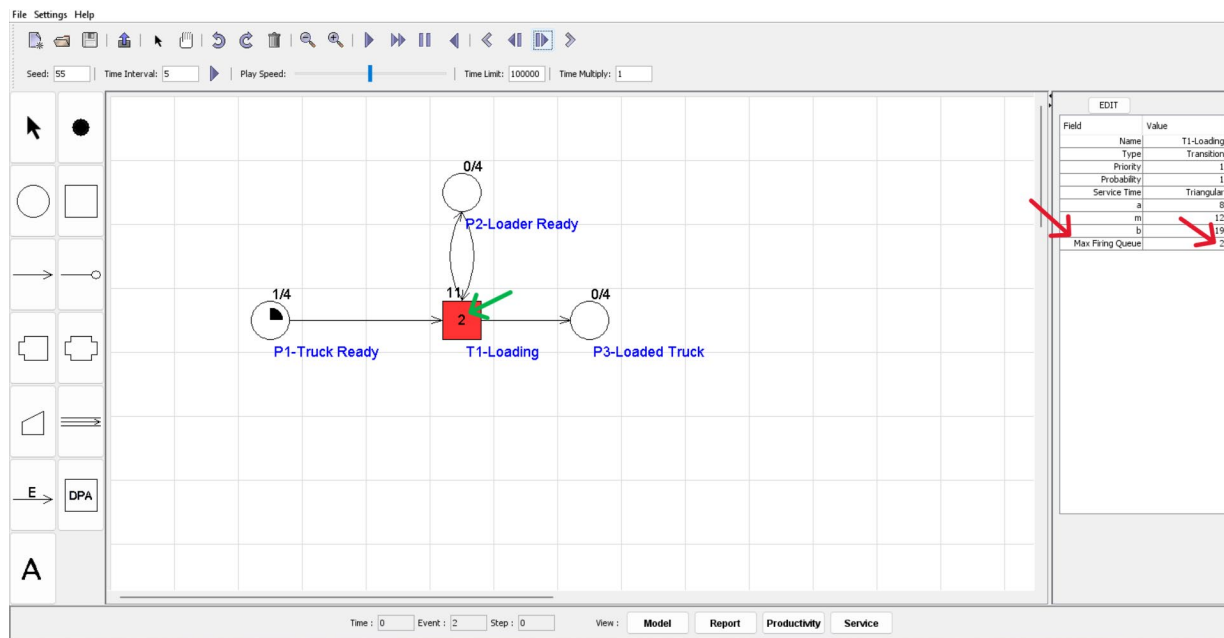


Figure 5. Model illustrating “Max Firing Queue” Feature (State 2).

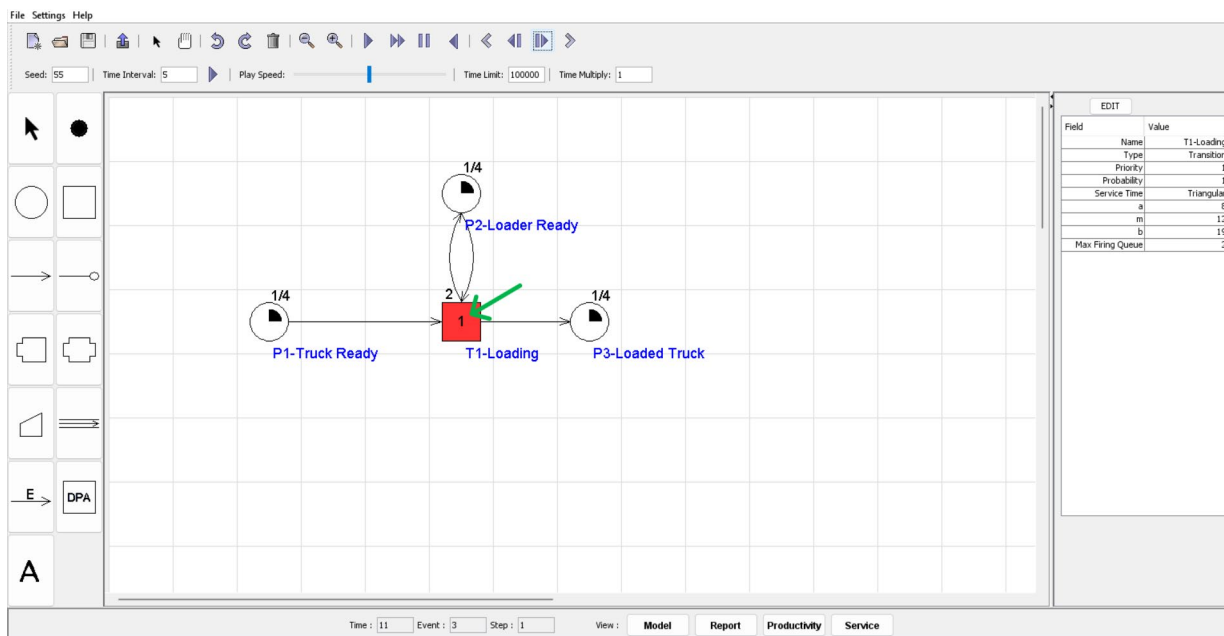


Figure 6. Model illustrating “Max Firing Queue” Feature (State 3).

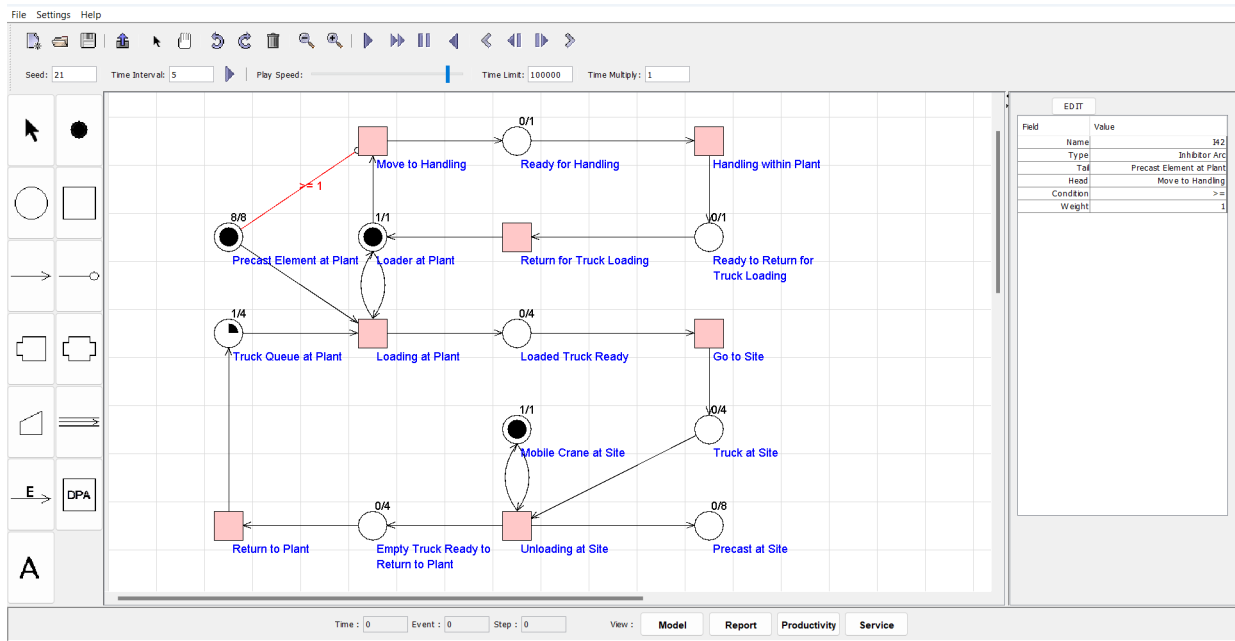


Figure 7. Model illustrating sample application of "Condition Arc".

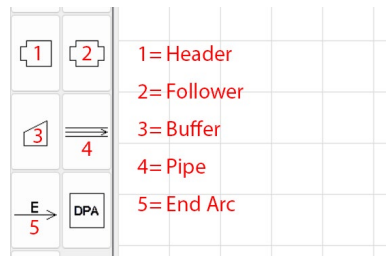


Figure 8. Header, Follower, Buffer, Pipe, and End Arc in Modelling Element Panel of COSMOS Simulator.

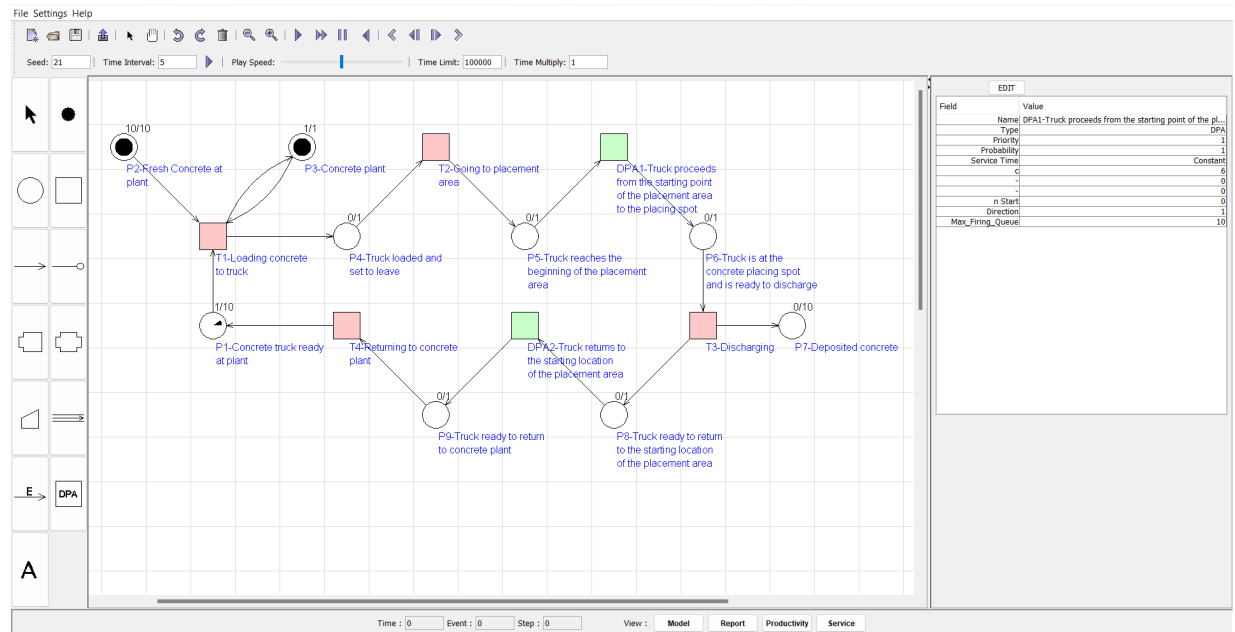


Figure 9. Dynamically Progressive Activities (DPAs) in a Concrete-Road Placement Model.