



AFIN 2016

The Eighth International Conference on Advances in Future Internet

ISBN: 978-1-61208-491-6

July 24 - 28, 2016

Nice, France

AFIN 2016 Editors

Przemyslaw Pocheć, University of New Brunswick, Canada

Tibor Gyires, Illinois State University, USA

AFIN 2016

Forward

The Eighth International Conference on Advances in Future Internet (AFIN 2016), held between July 24-28, 2016 in Nice, France, continued a series of events dealing with advances on future Internet mechanisms and services.

We are in the early stage of a revolution on what we call Internet now. Most of the design principles and deployments, as well as originally intended services, reached some technical limits and we can see a tremendous effort to correct this. Routing must be more intelligent, with quality of service consideration and 'on-demand' flavor, while the access control schemes should allow multiple technologies yet guarantying the privacy and integrity of the data. In a heavily distributed network resources, handling asset and resource for distributing computing (autonomic, cloud, on-demand) and addressing management in the next IPv6/IPv4 mixed networks require special effort for designers, equipment vendors, developers, and service providers.

We take here the opportunity to warmly thank all the members of the AFIN 2016 technical program committee, as well as the reviewers. We also kindly thank all the authors that dedicated much of their time and effort to contribute to AFIN 2016.

We also gratefully thank the members of the AFIN 2016 organizing committee for their help in handling the logistics and for their work that made this professional meeting a success.

We hope AFIN 2016 was a successful international forum for the exchange of ideas and results between academia and industry and to promote further progress in the area of future Internet. We also hope that Nice, France provided a pleasant environment during the conference and everyone saved some time enjoy the beautiful French Riviera.

AFIN 2016 Advisory Committee

Petre Dini, Concordia University - Montreal, Canada / China Space Agency Center - Beijing, China

Eugen Borcoci, University Politehnica of Bucharest, Romania

Jun Bi, Tsinghua University, China

AFIN 2016

Committee

AFIN Advisory Committee

Petre Dini, Concordia University - Montreal, Canada / China Space Agency Center - Beijing, China
Eugen Borcoci, University Politehnica of Bucharest, Romania
Jun Bi, Tsinghua University, China

AFIN 2016 Technical Program Committee

Rocío Abascal Mena, Universidad Autónoma Metropolitana - Cuajimalpa, México
Marie-Hélène Abel, University of Technology of Compiègne, France
Alessandro Aldini, University of Urbino "Carlo Bo", Italy
Javier A. Barria, Imperial College London, UK
Henri Basson, University of Lille North of France (Littoral), France
Khalid Benali, LORIA - Université de Lorraine, France
Jun Bi, Tsinghua University, China
Alessandro Bogliolo, University of Urbino, Italy
Eugen Borcoci, University Politehnica of Bucharest, Romania
Christos Bouras, University of Patras and Research Academic Computer Technology Institute, Greece
Tharrenos Bratitsis, University of Western Macedonia, Greece
Antonio Brogi, University of Pisa, Italy
Manuel J. Cabral S. Reis, IEETA & UTAD University, Portugal
Chin-Chen Chang, Feng Chia University, Taiwan
Grzegorz Chmaj, University of Nevada - Las Vegas, USA
Hauke Coltzau, Fernuniversität in Hagen, Germany
Javier Cubo, University of Malaga, Spain
Maurizio D'Arienzo, Seconda Università di Napoli, Italy
Guglielmo De Angelis, CNR - IASI, Italy
Sagarmay Deb, Central Queensland University, Australia
Gayo Diallo, University of Bordeaux Segalen, France
Daniel Díaz-Sánchez, University Carlos III - Madrid, Spain
Jonas Etzold, Fulda University of Applied Sciences, Germany
Florian Fankhauser, TU-Wien, Austria
Wu-Chang Feng, Portland State University, USA
Alex Galis, University College London, UK
Ivan Ganchev, University of Limerick, Ireland
Rosario G. Garroppo, Università di Pisa, Italy
Christos K. Georgiadis, University of Macedonia, Greece
Apostolos Gkamas, Higher Ecclesiastic Academy Vellas of Ioannina, Greece
William I. Grosky, University of Michigan-Dearborn, USA
Vic Grout, Glyndwr University, U.K.

Adam Grzech, Wrocław University of Technology, Poland
Puneet Gupta, Infosys Labs, India
Dongsoo Han, Korea Advanced Institute of Science and Technology(KAIST), Korea
Sung-Kook Han, Won Kwang University, Republic of Korea
Ourania Hatz, Harokopio University of Athens, Greece
Hiroaki Higaki, Tokyo Denki University, Japan
Pin-Han Ho, University of Waterloo, Canada
Tobias Hoßfeld, University of Würzburg, Germany
Li-Ling Hung, Aletheia University, Taiwan
Sandor Imre, Budapest University of Technology and Economics, Hungary
Norihiro Ishikawa, Komazawa University, Japan
Hanmin Jung, Korea Institute of Science and Technology Information (KISTI), South Korea
Vana Kalogeraki, Athens University of Economics and Business, Greece
Alexey M. Kashevnik, St.Petersburg Institute for Informatics and Automation of the Russian Academy of Sciences (SPIIRAS), Russia
Beob Kyun Kim, Electronics and Telecommunications Research Institute (ETRI), Korea
Changick Kim, Korea Advanced Institute of Science and Technology (KAIST) - Daejeon, Korea
Mario Koeppen, Kyushu Institute of Technology, Japan
Samad S. Kolahi, Unitec Institute of Technology, New Zealand
Nicos Komninos, Aristotle University of Thessaloniki, Greece
Christian Kop, Alpen-Adria-Universitaet Klagenfurt, Austria
George Koutromanos, National and Kapodistrian University of Athens, Greece
Annamaria Kovacs, Goethe University Frankfurt am Main - Institute for Computer Science, Germany
Liping Liu, University of Akron, U.S.A.
Jean-Pierre Lorré, Linagora, France
Maode Ma, Nanyang Technological University, Singapore
Olaf Maennel, Tallinn University of Technology, Estonia
Massimo Marchiori, University of Padua and Atomium Culture, Italy
Brandeis H. Marshall, Purdue University, USA
Francisco Martin, University of Lisbon, Portugal
Bisharat Rasool Memon, University of Southern Denmark, Denmark
Rao Mikkilineni, C3DNA, USA
Debajyoti Mukhopadhyay, Maharashtra Institute of Technology, India
Juan Pedro Muñoz-Gea, Polytechnic University of Cartagena, Spain
Masayuki Murata, Osaka University, Japan
Juan Manuel Murillo, University of Extremadura, Spain
Prashant R.Nair, Amrita Vishwa Vidyapeetham University, India
Nikolai Nefedov, ETH Zürich, Switzerland
Jose Nino-Mora, Carlos III University of Madrid, Spain
António Nogueira, University of Aveiro, Portugal
Flavio Oquendo, IRISA - University of South Brittany, France
Andreas Papasalouros, University of the Aegean, Greece
Alexander Paspaspyrou, adesso mobile solutions GmbH, Germany
Giuseppe Patane', CNR-IMATI, Italy
Jens Myrup Pedersen, Aalborg University, Denmark
Przemyslaw Pochec, University of New Brunswick, Canada
Alain Pegatoquet, University of Nice-Sophia Antipolis, France
Graciela Perera, Northeastern Illinois University, USA

Agostino Poggi, Università degli Studi di Parma, Italy
Elaheh Pourabbas, National Research Council of Italy - Institute of Systems Analysis and Computer Science "Antonio Ruberti", Italy
Emanuel Puschita, Technical University of Cluj-Napoca, Romania
Mayank Raj, IBM, USA
Khairan Dabash Rajab, Najran University, Saudi Arabia
Jaime Ramírez, Universidad Politécnica de Madrid, Spain
Torsten Reiners, Curtin University, Australia
Jelena Revzina, Transport and Telecommunication Institute (TTI), Latvia
Simon Pietro Romano, University of Napoli 'Federico II', Italy
Gustavo Rossi, La Plata National University, Argentina
Kouchi Sakurai, Kyushu University, Japan
Dominik Samociuk, Silesian University in Technology, Gliwice, Poland
Demetrios G Sampson, University of Piraeus, Greece
Abdolhossein Sarrafzadeh, Unitec Institute of Technology - Auckland, New Zealand
Hira Sathu, Unitec Institute of Technology, New Zealand
Hiroyuki Sato, University of Tokyo, Japan
Hans D. Schotten, University of Kaiserslautern, Germany
Bernd Schuller, Jülich Supercomputing Centre, Germany
Omair Shafiq, University of Calgary, Canada
Asadullah Shaikh, College of Computer Science and Information System - Najran University, Saudi Arabia
Nikolay Shilov, St. Petersburg Institute for Informatics and Automation of the Russian Academy of Sciences (SPIIRAS), Russia
Gurdip Singh, National Science Foundation, USA
Dimitrios Serpanos, University of Patras and ISI, Greece
Dorgham Sisalem, Iptelorg/Tekelek, Germany
Michael Sheng, The University of Adelaide, Australia
Vasco N. G. J. Soares, Instituto de Telecomunicações / Polytechnic Institute of Castelo Branco, Portugal
José Soler, Technical University of Denmark, Denmark
Mukundan Sridharan, The Samraksh Company, USA
Kostas Stamos, Technological Educational Institute of Western Greece, Greece
Tim Strayer, BBN Technologies, USA
Maciej Szostak, Wroclaw University of Technology, Poland
Alessandro Testa, Ministry of Economy and Finance, Italy
Brigitte Trousse, INRIA Sophia Antipolis, France
Steve Uhlig, Queen Mary, University of London, UK
Hans van den Berg, TNO / University of Twente, Netherlands
Rob van der Mei, CWI Centrum Wiskunde en Informatica, The Netherlands
Costas Vassilakis, University of Peloponnese, Greece
Sodel Vázquez Reyes, Universidad Autónoma de Zacatecas, Mexico
Massimo Villari, University of Messina, Italy
Maurizio Vincini, Università di Modena e Reggio Emilia, Italy
Jozef Wozniak, Gdańsk University of Technology, Poland
Zhixian Yan, Samsung Research, USA
Jianguo Yao, Shanghai Jiao Tong University, China
Chai Kiat Yeo, Nanyang Technological University, Singapore
Martin Zelm, INTEROP-VLab, Belgium
Fan Zhao, Florida Gulf Coast University, U.S.A.

Copyright Information

For your reference, this is the text governing the copyright release for material published by IARIA.

The copyright release is a transfer of publication rights, which allows IARIA and its partners to drive the dissemination of the published material. This allows IARIA to give articles increased visibility via distribution, inclusion in libraries, and arrangements for submission to indexes.

I, the undersigned, declare that the article is original, and that I represent the authors of this article in the copyright release matters. If this work has been done as work-for-hire, I have obtained all necessary clearances to execute a copyright release. I hereby irrevocably transfer exclusive copyright for this material to IARIA. I give IARIA permission to reproduce the work in any media format such as, but not limited to, print, digital, or electronic. I give IARIA permission to distribute the materials without restriction to any institutions or individuals. I give IARIA permission to submit the work for inclusion in article repositories as IARIA sees fit.

I, the undersigned, declare that to the best of my knowledge, the article does not contain libelous or otherwise unlawful contents or invading the right of privacy or infringing on a proprietary right.

Following the copyright release, any circulated version of the article must bear the copyright notice and any header and footer information that IARIA applies to the published article.

IARIA grants royalty-free permission to the authors to disseminate the work, under the above provisions, for any academic, commercial, or industrial use. IARIA grants royalty-free permission to any individuals or institutions to make the article available electronically, online, or in print.

IARIA acknowledges that rights to any algorithm, process, procedure, apparatus, or articles of manufacture remain with the authors and their employers.

I, the undersigned, understand that IARIA will not be liable, in contract, tort (including, without limitation, negligence), pre-contract or other representations (other than fraudulent misrepresentations) or otherwise in connection with the publication of my work.

Exception to the above is made for work-for-hire performed while employed by the government. In that case, copyright to the material remains with the said government. The rightful owners (authors and government entity) grant unlimited and unrestricted permission to IARIA, IARIA's contractors, and IARIA's partners to further distribute the work.

Table of Contents

Node Movement Control Based on Swarm Intelligence for a Mobile Medium Ad hoc Network 1
Hanin Almutairi, John DeDourek, and Przemyslaw Pochec

Podcast for Radio Studio of Zilina University 9
Juraj Fabus, Viktoria Fabusova, Peter Kolarovszki, and Jiri Tengler

Node Movement Control Based on Swarm Intelligence for a Mobile Medium Ad hoc Network

Hanin Almutairi, John DeDourek, Przemyslaw Pocheć

Faculty of Computer Science

University of New Brunswick

Fredericton, Canada

e-mail: {hanin.almutairi, dedourek, pocheć}@unb.ca

Abstract—A Mobile Ad hoc Network (MANET) is a network of wireless mobile devices capable of communicating with one another without any reliance on a fixed infrastructure. A Mobile Medium Network is a set of mobile forwarding nodes functioning as relays for facilitating communication between the users of this Mobile Medium. The performance of the Mobile Medium depends on the Mobile Medium node density, distribution and movement. In the proposed new paradigm for node movement control based on swarm intelligence, the movement is determined based on whether the nodes are at the locations where data forwarding activity recently took place or not. Simulation results show that directing the nodes to the locations where the forwarding activity has recently happened significantly affects the delivery rates in the Mobile Medium networks. For some networks, with a few forwarding nodes initially dispersed in a large region, applying the swarm intelligence algorithm increases the delivery ratio by up to 50%.

Keywords—mobility models; self-organizing mobile network; swarm intelligence; Mobile Medium; M2ANET

I. INTRODUCTION

A MANET is a set of mobile devices that cooperate with each other by exchanging messages and forwarding data [1][2]. A Mobile Medium Ad hoc Network (M2ANET) proposed in [3] is a particular configuration of a typical MANET where all mobile nodes are divided into two categories: (i) the forwarding only nodes forming the so called Mobile Medium, and (ii) the communicating nodes, mobile or otherwise, that send data and use this Mobile Medium for communication. The advantage of this M2ANET model is that the performance of such a network is based on how well the Mobile Medium can carry the messages between the communicating nodes and not based on whether all mobile nodes form a fully connected network. An example of a M2ANET is a cloud of autonomous drones released over an area of interest facilitating communication in this area. The movement of nodes in a M2ANET can be predefined by the user, selected at random or purposefully controlled for the best performance. When the mobile nodes select for themselves their movement, we call to such a network a Self-organizing Mobile Medium Ad hoc Network (SMMANET). A sample node movement control for a SMMANET based on attraction/repulsion paradigm was proposed by Almutairi et al. [4]. There, the mobile nodes can move in any direction, except when they get too far apart: then they turn back to stay

together. This type of autonomous control was shown to improve the mobile network performance.

Recently, a number of projects that match the M2ANET model have been announced; they include Google Loon stratospheric balloons [5] and Facebook high altitude solar powered planes [6] for providing Internet services to remote areas, and the Swarming Micro Air Vehicle Network (SMAVNET) project where remote controlled planes are used to create an emergency network [7].

In Section II, we present background on self-organizing systems and swarm intelligence. The new movement pattern based on ant colony control is discussed in Section III. Simulation experiments of this movement under different scenarios are in Section IV. Finally, we present the experimental results in Section V, followed by the conclusion and future work.

II. STATE OF THE ART

A M2ANET is mobile network comprised of interconnected mobile nodes, which make wireless multi-hop communication possible for mobile users. M2ANETs exhibit a fault-resilient nature, given that they are not operating with a single point of failure and are very flexible. The deletion and addition of new nodes, forming new links are a normal part of operation of a M2ANET [1][8][9]. This paper focuses on applying the self-organization principles for controlling the movement of nodes in the Mobile Medium, aka M2ANET.

W. Ross Ashby formulated the original principle of the system of self-organization in 1947, although it was not published until 1962. In his paper, Ashby explained the fundamental concept of organization, and the integration of machines, and how they lead to what he referred to as a system of self-organization [10]. Later, in 1999, Bonabeau et al. defined the concept of self-organization relating to “Swarm Intelligence”. Self-organization can be defined as a set of dynamic spontaneous global structures that appear out of the local interactions between lower-level components of an initially disordered system [11][12]. Spontaneous means that the process is not controlled by any agent inside or outside the system. Based on purely local information, an agent chooses which rules the process and its initial conditions should follow. This is distributed across all the agents in the system, which follow the same process in

parallel. As a result of this, the organization is very robust, and self-repairs any damage or perturbations. Any elimination or replacement of individual agents will not affect the system. In such a complex system, the agents directly interact locally with other agents near them, by visual contact, chemical contact or by exchanging messages wirelessly, and affect the remote agents indirectly by changing the environment around them. The agents are goal-directed and select one outcome over another during the evolution of the system [12][13]. Self-organization can be found in many different areas of science, e.g., physics, chemistry, biology, and telecommunication. Swarming in groups of animals, flocks of birds, schools of fish, and colonies of insects are common examples of self-organization in nature. Individuals in swarms behave in a simple way that collectively create more complex behaviors. They interact locally with each other and with the environment around them to create a self-organization system able to solve complex problems [12][13].

Implementing a swarm system with self-organization features in wireless networks is a real challenge. Bonabeau et al. [11] present self-organization in swarms through positive feedback, negative feedback, fluctuations and multiple interactions. Positive feedback as a simple behavior may be presented as a recruitment and reinforcement. For example, the dancing of bees, or laying of pheromone and following these trails of ants, are kinds of recruitment for their fellow species to reach a food source. On the other hand, negative feedback represents a way of balancing positive feedback and stabilizing the collective pattern. Fluctuations, such as random searches and errors, are important for self-organization in swarms in order to create creativity, innovation and discover new solutions. Finally, multiple interactions appear from sharing and spreading information between agents in the swarm [11][13].

Swarm Intelligence (SI) is an artificial-intelligence approach to problem-solving using algorithms based on the self-organized collective behavior of social insects such as ants, bees, birds, fish, wasps, and termites that follow very basic rules [11]. Beni and Wang introduced the expression "Swarm Intelligence" in 1989 in the context of cellular robotic systems [14]. Natural swarm systems made up of millions of flexible individual agents following simple rules demonstrate complicated group behavior. Such systems can be found in ant and bee colonies, flocks of birds, and schools of fish [15][16]. SI based on the nature of insects provides a basis on which it is possible to explore collective (or distributed) problem-solving methods without centralized control or the provision of global models such as MANETs [16][17][18]. Swarm Intelligence algorithms can be used in MANETs and in M2ANETs to control the movement of the nodes in order to follow an optimal forwarding path during the network run time. Nodes using an SI algorithm have the same ability to connect as any other mobile nodes, except that they move dynamically and are called agents. The agents follow very simple rules, although there is no centralized

control structure dictating how individual agents should behave. These interactions between agents may lead to "intelligent" global behavior, unrecognized by the individual agents [19][20][21].

The Particle Swarm Optimization (PSO) algorithm was introduced to solve nonlinear function optimization based on swarm intelligence by Kennedy, Eberhart and Shi in 1995 [22]. Particle Swarm Optimization is an Artificial Intelligence (AI) technique, related to both genetic algorithms and evolutionary programming, to model group movement behavior inspired by flocks of birds and schools of fish. An example is birds flying randomly searching for food in different places, until one of the birds is close to the food source. The other birds then need to learn which bird is nearest to the food and how far away the food is. At this point, the bird shares the information about the position of the food with the other birds in the flock. Transference of the correct information will enable the flock to follow the bird closest to the food to reach the food [23] [24]. In this example, the flock represents the swarm solution and the food source represents the optimal solution.

Ant Colony Optimization (ACO) is a type of optimization algorithm modeled on the actions of an ant colony using a swarm intelligence method. In 1996 Marco Dorigo, Vittorio Maniezzo and Alberto Coloni proposed the ACO approach based on their observation of ant behavior in nature [25]. ACO methods are useful in problems that need to find paths to goals. The first ACO algorithms aimed to solve the NP-complete Travelling Salesman Problem [TPS] with the goal of finding the shortest round trip between a series of cities [25][26][27]. In nature, ants without vision (almost blind) explore the environment around the colony searching randomly for a food source. When an ant finds food, it leaves a chemical pheromone trail on the path taken returning to the colony carrying that food. The other ants start following that pheromone trail to reach the food source [28] [29]. Pheromone is not permanent, it evaporates over time and distance. The pheromone evaporates from the longer paths faster than the shortest one and in this way ants always find the shortest path to the food source. Artificial 'ants' as simulation agents locate optimal solutions by moving through a parameter of space representing all possible solutions to solve a problem [30][31][32].

Coloni, Dorigo and Maniezzo developed the first and simplest Ant Colony Optimization algorithm, called Ant System (AS) [25]. The Ant System algorithm was inspired by the parallel search over different paths for real ants in nature. Real ants take several ways to solve their problems based on the data and information stored in their memory about previously obtained results [25][33]. The AS transition probability was modified to include heuristic information. Also, a tabu list was added to the AS implementation as a memory capacity. In AS, a set of agents (Ants) follows local decisions to move through nodes (places) to solve a problem [34][35]. The probability rule used by the ant to move from place i to place j during iteration is:

$$p_{ij}^k = \begin{cases} \frac{\tau_{ij}^\alpha \eta_{ij}^\beta}{\sum_{k \notin tabu_k} \tau_{ik}^\alpha \eta_{ik}^\beta} & \text{if } j \notin tabu_k \\ 0 & \text{otherwise} \end{cases} \quad (1)$$

τ_{ij} - amount of pheromone trail,
 η_{ij} - visibility ($0 \leq \eta_{ij} \leq 1$),
 α - impact of trail defined by the user ($0 \leq \alpha \leq 1$),
 β - attractiveness defined by the user ($0 \leq \beta \leq 1$),
 $tabu_k$ - tabu list contain the visited cities by ant_k during current iteration.

The visibility value represents the heuristic information, which can be calculated by using the following expression:

$$\eta_{ij} = \frac{1}{d_{ij}} \quad (2)$$

d_{ij} - distance between place i to place j .

Each ant leaves a trail called pheromone τ after completing a solution to attract the other ants. This pheromone trail τ can be modified by other ants moving along the same path or it can just evaporate over time [35]. The pheromone τ_{ij} laid on the connected edge between place i and place j is updated by using the following equations:

$$\tau_{ij}(t+1) = (1-\rho)\tau_{ij}(t) + \sum_{k=1}^m \Delta\tau_{ij}^k \quad (3)$$

$$\Delta\tau_{ij} = \sum_{k=1}^m \Delta\tau_{ij}^k \quad (4)$$

$$\Delta\tau_{ij}^k = \begin{cases} Q/L_k & \text{if ant}_k \text{ used path}(i,j) \\ 0 & \text{otherwise} \end{cases} \quad (5)$$

ρ - the evaporation coefficient defined by the user ($0 \leq \rho \leq 1$),
 m -the number of ants,
 $\Delta\tau_{ij}^k$ - the pheromone quantity laid by ant_k on the path (i,j),
 Q - constant, often 1,
 L_k -the tour length of the solution obtained by ant_k.

The ant agents use the pheromone trail information to control movement through the search operation to find the optimal solution for the problem [32][33][35].

III. ANT COLONY MOVEMENT CONTROL IN MOBILE MEDIUM

M2ANET is a high dynamic network, also called Mobile Medium, where all the mobile nodes are moving in many directions at different speeds. This rapid movement of the mobile nodes causes changes in the M2ANET topology, which increase the rerouting and possibly disconnections between the source node and the destination node. This continual rerouting affects network performance and decreases packet transmission rates. In order to improve M2ANET performance, a dynamic-movement node-control algorithm based on SI is proposed to control the mobile node movement according to the node's awareness of the traffic condition. The proposed Ant System Node Control (ASNC) algorithm is implemented to control the mobile node

movements in M2ANET according to the traffic condition in the network. The proposed ASNC is adapted from the ACO algorithm, and more specifically from the AS algorithm [35]. In this paper the proposed ASNC algorithms is used for movement control of mobile nodes in a Mobile Medium, and not simply for routing. It should be noted here that a variety of related SI studies and algorithms are already used specifically for routing: Ant-colony-based Routing Algorithm (ARA) [36], Simple Ant Routing Algorithm (SARA) [37], Ad-hoc Networking with Swarm Intelligence (ANSI) [38], AntHocNet hybrid algorithm [39], AntNet routing algorithm [40], and HOPNET routing algorithm [41].

At the start, the mobile nodes are moving randomly in a M2ANET without any control. A stationary source node represents the ant colony while the destination node represents the position of the food source. The mobile nodes act like Ant-agents, they explore the simulation area randomly until the routing protocol detects the first forwarding path between the source and the destination. At this time, each active forwarding node, ant-agent, leaves a pheromone trail at its position, and the accumulation of the deposited pheromone shows the forwarding path that the packets transmit through from the source to the destination. Next, the other mobile nodes, ant-agents, start moving towards these pheromone trail positions deposited by the forwarding ant-agents. Each time a forwarding path is detected in the M2ANET, the active forwarding ant-agents deposit new pheromone trails at their forwarding positions. The pheromone trails are not permanent, they evaporate over time. Regarding a possible implementation of the ASNC approach in a M2ANET, while depositing the actual pheromone at a particular location may be possible in a biological system, the actual mobile network would have to use different means for marking and communicating the pheromone locations. While the means of implementing this pheromone marking is beyond the scope of this paper, one might consider having each node broadcast the intensity and the location of deposited pheromone trail to all other nodes in the network.

In the ASNC approach, the deposited pheromone locations are modified by ant-agents, mobile nodes, moving toward new forwarding positions, otherwise the pheromone evaporates from the forwarding position over time as specified in the AS update equation (Equation 3). The ant-agents follow the pheromone trail and move from one position to another using the AS probability rule (Equation 1). A sample evolution of the pheromone trail recorded in our sample experiments is illustrated in Figures 1 and 2. The pheromone trail marks the locations the forwarding activity took place recently and, we hypothesize, where the forwarding activity is likely to take place again. The size of each circle indicates the pheromone intensity, different colours are used to better visualize separate pheromone deposits. Circles at locations (50, 400) and (950, 600) mark the location of the data source and the destination, and not the pheromone deposits.

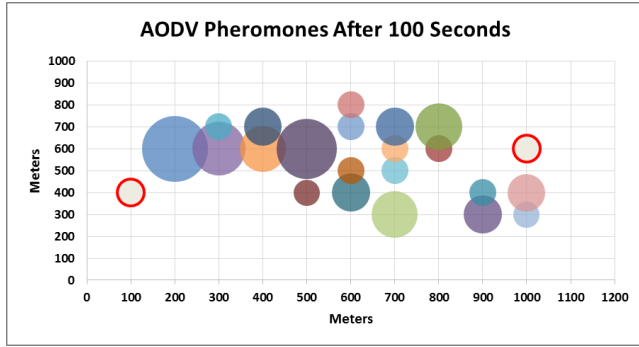


Figure 1. Initial phermone trail.

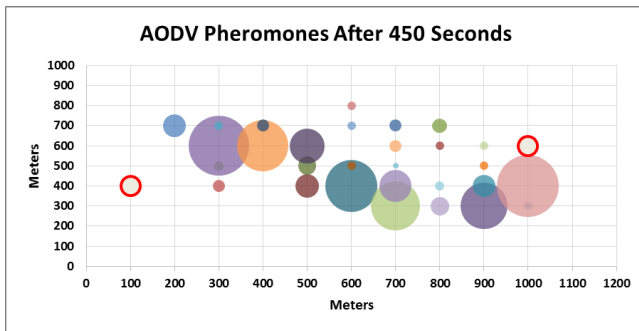


Figure 2. Evolved phermone trail showing preferred node locations.

The pheromone trail is deposited based on the traffic condition of M2ANET and is used to control the movement of ant-agents during the simulation allowing them to find a position on a forwarding path between the communicating nodes, the source and the destination, and consequently to improve the network performance.

IV. SIMULATION EXPERIMENT

We used simulation in ns2 to test the new proposed ASNC algorithm that aims to control the mobile node movement in M2ANET based on awareness of the traffic condition in the network. ASNC used to control the random movement of mobile nodes is adapted from the AS algorithm, which is one of the existing ACO algorithms. For comparison, we used the random mobility model as a reference case scenario, mostly because it is a standard model used in network simulation. The base case model used is the Random Way Point (RWP) model available in ns2 [42]. In RWP, nodes are moved in a piecewise linear fashion, with each linear segment pointing to a randomly selected destination and the node moving at a constant, but randomly selected speed.

All ASNC experiments simulated in ns2 initially utilized the RWP model in a restricted area of 1000x1000 meters. The mobile nodes, representing the ant agents, move toward random destinations at random speeds with an average speed of 4 m/s. In the experiments based on ASNC, two stationary nodes, the source and destination nodes located at (50,400) and (950,600) coordinates respectively, are communicating with each other using the CBR traffic generator over UDP.

The experiments run over two different ad-hoc network routing protocols, Ad hoc On-demand Distance Vector (AODV) and Destination Sequenced Distance Vector (DSDV), on simulated mobile networks with five different node densities: 5, 10, 20, 30, and 40 nodes. Node density indicates the total number of mobile nodes in the 1000 m by 1000 m square region modelled in the experiments. Each mobile network scenario has been simulated three times for 500 second simulation run time and the average results taken; simulation details are summarized in Table 1.

TABLE I. SIMULATION PARAMETERS

Parameters	
Simulator	NS-2.34
Channel Type	Channel / Wireless Channel
Network Interface Type	Phy/WirelessPhy
Mac Type	Mac/802.11
Radio-Propagation Type	Propagation/Two-ray ground
Interface Queue Type	Queue/Drop Tail
Link Layer Type	LL
Antenna	Antenna/Omni Antenna
Maximum Packet in ifq	50
Area (n * n)	1000 x 1000m
Source node location	(50, 400)
Destination node location	(950, 600)
Source Type	CBR over UDP packetSize_ 512 interval_ 0.05
Simulation Time	500 s
Routing Protocol	AODV and DSDV

At the beginning of each experiment, the mobile nodes move randomly to explore the simulation area without any control. The traffic of the network is observed during the entire simulation run time, waiting for the routing protocol to detect a forwarding path. The control mechanism starts when the first forwarding path is detected by the routing protocol. At this moment the information about the forwarding path becomes available including the ids of the active forwarding nodes and their positions. At the same time each forwarding node deposits a pheromone trail τ marking the location where the forwarding activity took place. (In the experiment, the simulator kept the locations of the pheromone deposits and made them available to all the network nodes.) The amount of the deposited pheromone trail τ on a new forwarding position is initially equal to one. These pheromone trails demonstrate the forwarding path that has been used to transmit data packets between the communicating nodes. For the ant agents, the source node represents the ant colony while the destination node represents the food source in the simulation. Rather than moving randomly, the nodes, ant-agents, move toward the positions where the pheromone deposits are the strongest marking the locations where the forwarding activity took place recently. The closest pheromone trail position to the current position of the mobile node with the highest pheromone amount will be selected.

The decision about where to move next during the

simulation is taken by applying the probability rule, which is also adapted from the AS algorithm (Equation 1). In ASNC the values of the probability rule parameters for α , the impact of the trail, and β , the attractiveness, were set to 0.5 while the distance value in the visibility $\eta_{ij} = \frac{1}{a_{ij}}$ (Equation 2) was calculated based on the distance between the communication nodes and the forwarding position. Changing the values of α and β in the experiments did not affect the Packet Delivery Ratio (PDR) results. When the mobile nodes reach their destination positions, they pause for three seconds before determining again where to move next.

A pheromone trail deposited on a forwarding position is modified when another mobile node moves toward this forwarding position, otherwise the pheromone evaporates over time. To update the pheromone trail τ the update equation (Equation 3) has been adapted from the AS algorithm where the evaporation coefficient ρ value is equal to 0.01 and the constant Q is equal to 1. Also, changing the values of Q and ρ did not affect the PDR result of the experiments. The update equation increases the pheromone amount on the visited forwarding positions and reduces and/or evaporates the pheromone amount on the unvisited forwarding positions. A new pheromone trail τ is deposited by the forwarding nodes each time the routing protocol detects a new forwarding path in M2ANET. The mobile nodes visit several forwarding positions before they find the perfect positions to transmit packets between communicating nodes.

V. RESULTS AND ANALYSIS OF ASNC

The performance of a Mobile Medium network implementing the ASNC node movement control algorithm was investigated using the simulated networks with varying number of nodes and running two different routing protocols AODV and DSDV. The experiments were conducted using the ns2 simulator and the performance of a M2ANET was measured in terms of PDR, End-to-End Delay and Forward Path Time Detection (FPTD).

A. AODV performance: PDR

Attracting the mobile nodes to move toward the best forwarding positions based on the deposited pheromone trails resulted in a significant increase in the delivery ratio in M2ANET (Figure 3). At a very low density, with only five mobile nodes, no forwarding paths were detected by the routing protocol AODV during the entire simulation run time. As a result, zero packets have been delivered in these experiment. Increasing the mobile node density to 10 showed a PDR of 26% for ASNC, compared with 4% in the Random movement experiment. The experiment with 20 mobile nodes in ASNC showed the most interesting results and the best benefit of controlling the node movements based on the behavior of ants in nature. With 20 mobile nodes, 89% of the data packets have been successfully delivered to the destination resulting in an improvement of 57% over the

Random movement. The network with 30 or 40 mobile node, i.e., at high node density, performed very well at any circumstances giving a delivery ratio of 90% and 97% in ASNC compared with 74% and 88% with the Random movement, respectively.

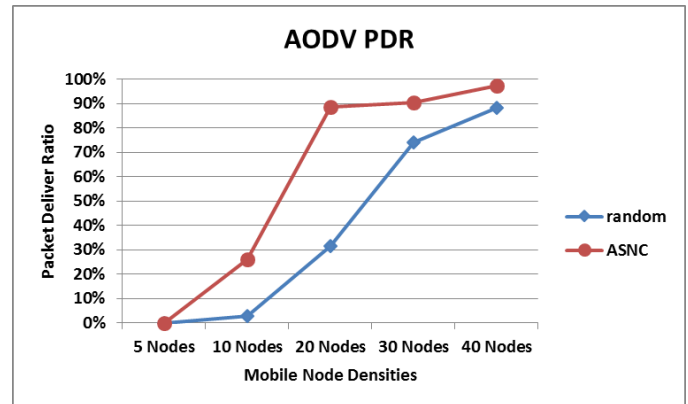


Figure 3. AODV performance: delivery ratio.

B. AODV performance: end to end delay

At five mobile nodes density, no packets have been delivered to the destination, (Figure 4). The longest packet delay, observed in the network with 10 mobile nodes, dropped from 786 ms in the Random scenario to 239 ms in ASNC. For a network with 20 mobile nodes, the packet delay decreased to 73 ms (together with the increase in the PDR) from 583 ms in Random movement. For the high mobile node densities of 30 and 40 nodes, the end to end delays were 70 ms and 69 ms in ASNC and 201 ms and 125 ms in the Random scenario.

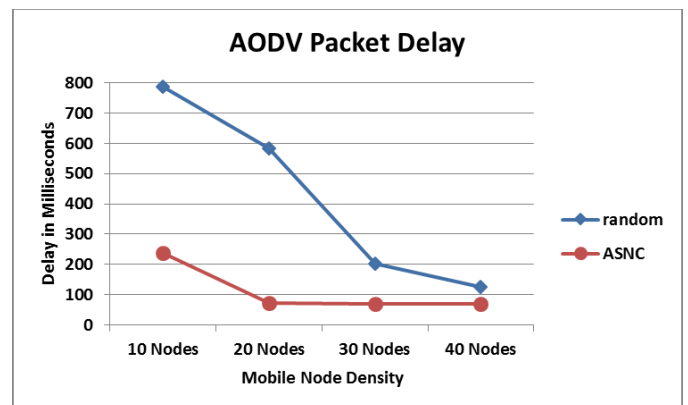


Figure 4. AODV performance: delay.

C. AODV performance: FPTD

For the experiments with 10 mobile nodes, the average FPTD for AODV was 279 seconds, reduced to 87 seconds by increasing the number of the mobile nodes to 20, (Figure 5). With high mobile node densities, the AODV routing protocol was able to detect the first forwarding path in a very short time, less than 10 seconds, which also improved the overall delivery ratio during the experiments.

D. DSDV performance: PDR

As expected, no packet were delivered in the very low mobile node density experiments (Figure 6). For 10 mobile nodes, 1.3% of the total packets have been delivered, compared with 0.6% delivery ratio in the Random movement over the DSDV routing protocol. These result changed when more mobile nodes are added in the experiments, i.e., when using 20 mobile nodes rather than just 10 nodes. The PDR reached 55% during the experiments with only 20 mobile nodes, almost 50% higher than the Random movement even with 40 nodes. In all previous experiments using either DSDV or AODV, scenarios with 20 mobile nodes showed the best absolute improvement in performance when using the ASNC algorithm for controlling the movements of mobile nodes in M2ANET. With a density of 30 mobile nodes, the PDR in the Random movement was 21% of packets delivered, which improved to 55% with ASNC. The density of 40 mobile nodes resulted in the PDR of 58%, which is higher than in the Random scenario.

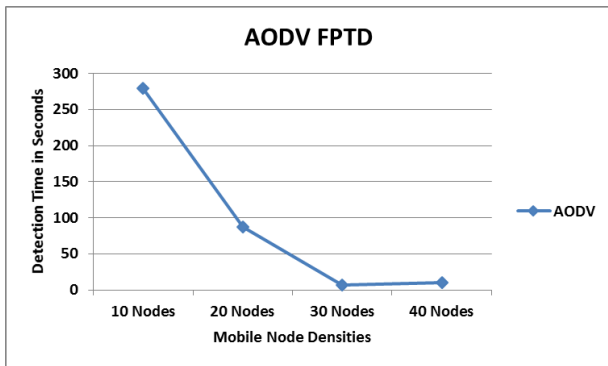


Figure 5. AODV performance: path detection.

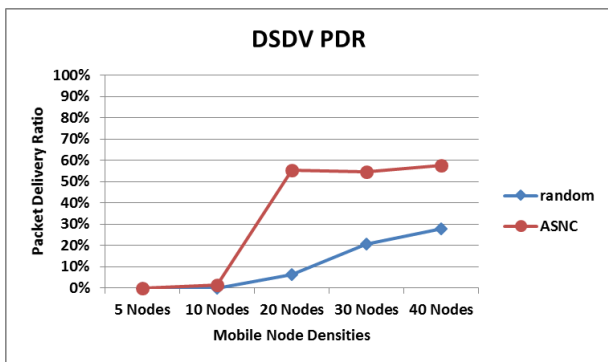


Figure 6. DSDV performance: delivery ratio.

E. DSDV performance: end to end delay

No packets were delivered in a network with only five nodes. The packet delay for a network with 10 mobile nodes and when ASNC was used improved to 208 ms, compared with 760 ms in the Random movement, (Figure 7). Increasing the mobile node density to 20 nodes decreased the delay to 49 ms, which was half the delay experienced in the Random movement. The packet delay at the high mobile node density of 30 and 40 nodes reached 39 ms and 50 ms respectively,

while in the Random movement the results were above 80 ms.

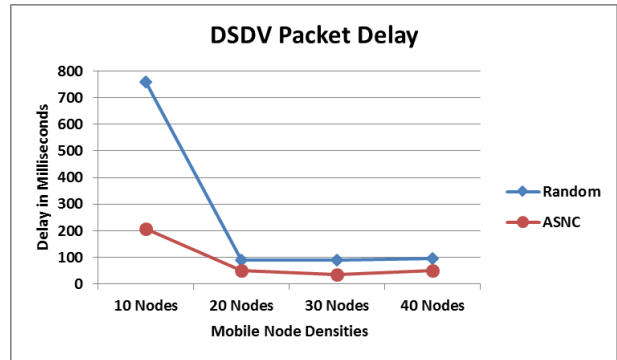


Figure 7. DSDV performance: delay.

F. DSDV performance: FPTD

Unlike in AODV, detecting a forwarding path in DSDV proactive routing protocol took a considerable time. In the ASNC experiments with 10 mobile nodes, it DSDV took 299 seconds to find a good route for transmitting data packets between the communication nodes, which was 20 seconds longer than in the experiments with AODV (Figure 8). The FPTD for the network with 20 mobile nodes utilizing DSDV was 90 seconds, followed by 71 seconds for 30 nodes and 50 seconds for 40 nodes. For ASNC over AODV experiments (Figure 5), the FPTD with 20 mobile nodes was 87 seconds, then dropped significantly for the high mobile node densities, showing a difference of at least 50 seconds compared to the DSDV results. The DSDV delay in detecting forwarding paths, which was larger than the delay in AODV, negatively affected the PDR network performance, Figures 3 and 6.

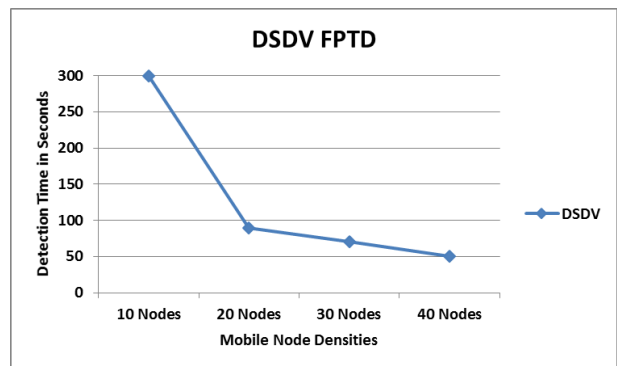


Figure 8. DSDV performance: path detection.

Please note again, that in the experiments with five mobile nodes, no forwarding paths were detected during the entire 500 second simulation experiments with either AODV or DSDV routing protocol.

VI. CONCLUSION AND FUTURE WORK

The new proposed ASNC algorithm is an adaptive ACO algorithm that aims to control the movement of mobile nodes in M2ANET. The adaptive ASNC algorithm is a complex

self-organization paradigm used for controlling the movement of mobile nodes and make them behave in a way similar to a swarm of ants in nature. The ASNC algorithm observes the traffic condition in the network, waiting for the right moment to move the mobile nodes in the direction of where the forwarding activity is taking place. The mobile nodes in ASNC represent the ant-agents; they leave a trail in their path, called the pheromone trail, to attract other ant-agents to move toward the places they marked. These marked locations are the positions in the network where forwarding activity took place recently, and moving toward these positions was shown to improve the network performance. The ASNC experiments were simulated for different mobile node densities over AODV and DSDV routing protocols. The ASNC PDR results showed significant improvements over the scenarios with the Random movement, at all the mobile node densities. As expected, the experiments with the low mobile node densities showed a low delivery ratio compared with the PDR results for the high mobile node densities, for both AODV and DSDV. Moreover, the experiment with 20 mobile nodes demonstrated the highest benefit of using ASNC in M2ANET for controlling the movement of the mobile nodes. In ASNC, the networks running AODV routing protocol performed better than the ones with DSDV. AODV performed better in a highly dynamic network, such as M2ANET, due to its quick discovery and maintenance of the routes. In the experiment with high mobile node densities, AODV was able to detect the first forwarding path in less than 10 seconds, while it took DSDV between 50 and 70 seconds. The performance of ASNC in M2ANET over AODV showed better delivery ratio results, where 10% to 50% more packets were delivered than in the experiments with the Random movement. DSDV experiments showed performance improvements of 20-50 percent when compared to the reference Random movement.

In future, other scenarios may be considered in experiments, such as changing the source and destination positions during the simulation rather than keeping them stationary for the entire time. In addition, a scenario with multiple communication nodes, two senders and one receiver or one sender communicating with different receivers may provide interesting results. Also, as the ASNC approach requires that all mobile network nodes have access to the locations indicating where the pheromones have been deposited, the means of distributing this information to all nodes may need to be developed. The obvious means of accomplishing this would be to use broadcast messages sent by each node at the time when it deposits a pheromone trail, however, the effectiveness of broadcasting in a network like M2ANET, and any delays involved in this process would require further investigation. Other routing protocols may also be considered, e.g., Dynamic Source Routing (DSR), in order to compare the performance over different routing protocols. As the ASNC algorithm adapts the AS from the ACO algorithms in order to control the movement of mobile nodes, other SI algorithms could also be considered to control

the movement of the mobile nodes, for example Rank-Based Ant System, Max-Min Ant System and Best-Worst Ant System. Algorithms from BCO rather than ACO could also be explored using, for example, the Artificial Bee Colony approach.

ACKNOWLEDGMENT

This work was sponsored and funded by the Ministry of Higher Education of Saudi Arabia through the Saudi Arabian Cultural Bureau in Canada.

REFERENCES

- [1] S. Basagni, M. Conti, S. Giordano, and I. Stojmenovic (Eds.), *Mobile Ad Hoc Networking*, New York, Wiley-IEEE Press, 2001.
- [2] F. Bei and A. Helmy, *A survey of mobility models in wireless Ad hoc Networks*, University of California, USA, 2004.
- [3] J. DeDoutre and P. Pochee, "M2ANET: a Mobile Medium Ad Hoc Network", *Wireless Sensor Networks: Theory and Practice*, WSN 2011, Paris, France, Feb. 2011, pp. 1-4.
- [4] H. Almutairi, J. DeDoutre, and P. Pochee, "Dynamic Node Movement Control in a Mobile Medium Ad hoc Network", *The Seventh International Conference on Emerging Networks and Systems Intelligence*, EMERGING 2015, Nice, France, July 2015, pp. 50-54.
- [5] H. Hodson, "Google's Project Loon to float the internet on balloons", *New Scientist*, October 2013.
- [6] J. Brusteine, "Facebook's Flying Internet Service, Brought to You by Drones", *Bloomberg Businessweek*, March 4, 2014.
- [7] A. J. Pacheco, D. Bouhired, Y. Gasser, J-C. Zufferey, D. Floreano and B. Rimoldi, "Implementation of a Wireless Mesh Network of Ultra Light MAVs with Dynamic Routing", *IEEE GLOBECOM 2012, 3rd International IEEE Workshop on Wireless Networking & Control for Unmanned Autonomous Vehicles 2012*, Anaheim, California, USA, 2012.
- [8] D. P. Agrawal and Q. A. Zeng, *Introduction to Wireless and Mobile Systems*, Thomson Engineering, 2010, 1591-1596.
- [9] S. K. Sarkar, T. G. Basavaraju, and C. Puttamadappa, *Ad Hoc Mobile Wireless Networks, Principles, Protocols, and Applications*, Auerbach Publications Taylor & Francis Group, 2007.
- [10] W. R. Ashby, "Principles of the self-organizing system", *Principles of Self-Organization*, Transactions of the University of Illinois Symposium, H. Von Foerster and G. W. Zopf, Jr. (eds.), Pergamon Press: London, UK, 1962, pp. 255-278.
- [11] E. Bonabeau, M. Dorigo, and G. Théraulaz, *Swarm Intelligence: From Natural to Artificial Systems*, Oxford, UK: Oxford University Press, 1999.
- [12] S. Camazine, J. Deneubourg, N. R. Franks, J. Sneyd, G. Théraulaz, and E. Bonabeau, *Self-Organization in Biological Systems*, Princeton University, 2001.
- [13] Z. Zhang, K. Long, J. Wang, and F. Dressler, "On Swarm Intelligence Inspired Self-Organized Networking: Its Bionic Mechanisms, Designing Principles and Optimization Approaches", *Communication Surveys & Tutorials*, IEEE, Volume 16, Issue 1, July 2013, pp. 513-537.
- [14] G. Beni and J. Wang, "Swarm intelligence in cellular robotics systems", *Proceeding of NATO Advanced Workshop on Robots and Biological System*, 1989, pp. 1-9.
- [15] A. Jevtic and D. Andina, *Swarm Intelligence and Its Applications in Swarm Robotics*, 6th WSEAS Int. Conference on Computational Intelligence, Man-Machine Systems and Cybernetics, Tenerife, Spain, December 14-16, 2007, pp. 41-46.
- [16] A. K. Mishra, M. N. Das, and T. C. Panda, *Swarm Intelligence Optimization: Editorial Survey*, *International journal of Emerging Technology and Advanced Engineering*, Volume 3, Issue 1, January 2013, pp. 217-230.
- [17] S. Ziane and A. Mellouk, *A Swarm Intelligent Multi-path Routing for Multimedia Traffic over Mobile Ad hoc Networks*, Q2SWinet'05, Montreal, Quebec, Canada, October 2005, pp. 55-62.
- [18] C. Grosan, A. Abraham, and M. Chis, *Swarm Intelligence in Data Mining*, *Studies in Computational Intelligence (SCI)* 34, 2006, pp. 1-20.

- [19] D. Floreano and C. Mattiussi, *Bio-inspired Artificial Intelligence: Theories, Methods, and Technologies*, The MIT Press, e-ISBN: 9780262272858, August 2008.
- [20] J. Kennedy, R. C. Eberhart, and Y. Shi, *Swarm Intelligence*, Elsevier, ISBN 1-55860-595-9, 2001.
- [21] D. P. Buus, *Constructing Human-Like Architecture with Swarm Intelligence*, Aalborg University, Project Library, Aalborg, Denmark, August 2006.
- [22] J. Kennedy and R. Eberhart, *Particle Swarm Optimization*, IEEE Conference on Neural Networks, Perth, WA, Nov./Dec. 1995, pp. 1942-1948.
- [23] Qinghai Bai, "Analysis of Particle Swarm Optimization Algorithm", *CCIS Computer and Information Science*, Vol. 3, No. 1, February 2010, pp. 180-184.
- [24] J. van Ast, R. Babuska, and B. De Schutter, "Particle Swarms in Optimization and Control", *Proceedings of the 17th IFAC World Congress*, Seoul, Korea, July 2008, pp. 5131–5136.
- [25] M. Dorigo, V. Maniezzo, and A. Coloni, "The Ant System: Optimization by a colony of cooperating agents", *IEEE, Transactions on Systems, Man, and Cybernetics-Part B*, Vol. 26, No. 1, 1996, pp.1-13.
- [26] M. Dorigo and T. Stutzle, *Ant Colony Optimization*, MIT Press, ISBN 0-262-04219-3, June 2004.
- [27] S. Dehuri, S. Ghosh, and S. Cho, *Integration of Swarm Intelligence and Artificial Neural Network*, World Scientific, ISBN: 978-981-4467-31-5, June 2011.
- [28] L. P. Walters, *Application of Swarm Intelligence*, Chapter 7 & 10, ISBN 978-1-61728-813-5, Nova Science Publishers, 2011.
- [29] S. Prasad, Y.P.Singh, and C.S.Rai, "Swarm Based Intelligent Routing for MANETs", *International Journal of Recent Trends in Engineering*, Vol 1, No. 1, May 2009, pp. 153-158.
- [30] R. Singh, D. K. Singh and L. Kumar, "Swarm Intelligence Based Approach for Routing in Mobile Ad Hoc Networks", *International Journal of Science and Technology Education Research* Vol. 1(7), December 2010, pp. 147–153.
- [31] S. Binitha and S. S. Sathya, "A Survey of Bio inspired Optimization Algorithms", *International Journal of Soft Computing and Engineering (IJSC)*, ISSN: 2231-2307, Vol. 2 (2), May 2012, pp. 137-151.
- [32] S. D. Shtovba, "Ant Algorithms: Theory and Applications", *Programming and Computer Software*, Vol. 31, No. 4, 2005, pp. 167-178.
- [33] A. P. Engelbrecht, *Computational Intelligence An Introduction*, John Wiley & Sons, Ltd, ISBN 978-0-470-03561-0, Chapter 17, 2007.
- [34] G. C. Onwubolu and B. V. Babu, *New Optimization Techniques in Engineering*, *Studies in Fuzziness and Soft Computing*, Springer, Vol. 141, Chapter 5, ISBN 978-3-540-39930-8, 2004.
- [35] P. Guo and Z. Liu, "An Ant System based on Moderate Search for TSP", *ComSIS*, Vol. 9, No. 4, Special Issue, December 2012, pp. 1533-1552.
- [36] M. Gunes, U. Sorges, and I. Bouazizi, "ARA – The Ant-Colony Based Routing Algorithm for MANETs", *IWAHN*, Vancouver, British Columbia, Canada, August 2002, pp. 1-7.
- [37] F. Correia and T. Vazao, "Simple Ant Routing Algorithm", *ICOIN*, IEEE, January 2008, pp. 1-8.
- [38] S. Rajagopalan and C. Shen, *ANSI: A swarm intelligence-based unicast routing protocol for hybrid ad hoc networks*, Elsevier, 2006.
- [39] G. Di Caro, F. Ducatelle, and L. M. Gambardella, "AntHocNet: an Ant-Based Hybrid Routing Algorithm for Mobile Ad Hoc Networks", *Proc. 8th International Conf. on Parallel Problem Solving from Nature*, 2004, pp. 461-470.
- [40] G. Di Caro and M. Dorigo, "AntNet: A Mobile Agents Approach to Adaptive Routing in Communication Networks", unpublished presentation, Ninth Dutch Conference on Artificial Intelligence (NAIC '97), November 1997.
- [41] J. Wang, E. Osagie, P. Thulasiraman, and R. K. Thulasiram, "HOPNET: A hybrid ant colony optimization routing algorithm for mobile ad hoc network", *Journal of Ad Hoc Networks*, Elsevier, Vol. 7, No. 4, June 2009, pp. 690-705.
- [42] H. Ekram and T. Issariyakul, *Introduction to Network Simulator ns2*, Springer, 2009.

Podcast for Radio Studio of Zilina University

Juraj Fabus, Viktoria Fabusova, Peter Kolarovszki, Jiri Tengler
Department of Communication, University of Zilina
Zilina, Slovak republic

e-mail: {juraj.fabus, viktoria.fabusova, peter.kolarovszki, jiri.tengler}@fpedas.uniza.sk

Abstract— The paper deals with podcasting, which is an appropriate form of distribution of radio programs of University of Zilina Radio. In this paper, we explain and define several terms related to podcasting, its creation and downloading. Our work is presented in the context of Slovak and Czech Republic. We wanted to find out which programs would be welcomed by the listeners as podcasts on the website of the Rapeš Internet radio. In the last part, the design of podcast for radio studio of Zilina University is described.

Keywords-podcasting; RSS feed; radio; listener; podest.

I. INTRODUCTION

Podcasting got into the user awareness during 2004. It was a year after the Apple Computer company introduced the iPod media player for audio files. iPod gave name to this phenomenon, although it is not needed for playing podcasts.

Podcasting is a strength for communication between different individuals. Nowadays, anyone has the opportunity to become visible on the Internet. Podcasters, even with first podcasts, can reach a geographically diverse audience; everything, without transmitters, satellites, regulations. The whole world can really listen [1].

Basically, Podcasting is an audio content available on the Internet, which can be delivered to the computer or portable player.

University of Žilina does not use in its radio station any technology to make their archive available online. In our paper, we describe how this problem can be solved through the podcast technology.

Section 2 describes the history of podcasting. Software for receiving podcasts and for creating and editing records is introduced in Section 3. Sections 4, 5 and 6 analyse the current state of research in the area of using podcasts. The procedure to design podcast for the student radio of University of Zilina is described in Section 7.

II. HISTORY OF PODCASTING

Adam Curry, who is an MTV presenter of radio station MTV and interactive creator, tried for several years to find ways to use broadcast video and audio streams on the Internet. In 2000, Curry met with respected programmer Dave Winer, who was an expert in the development of hundreds of Internet applications, as well as the creator of Rich Site Summary (RSS) format for reading articles and reports on the Internet. Together, Curry and Winer, theorized about the possible way to use RSS for sending not only headlines but also audio and video files as such. As a result

of their theories, Winer created the <enclosure> tag through the RSS specifications, enabling applications to transfer files from the Internet by following the simple URLs through the source pointing to the file.

Curry began working. He tried to find ways to use RSS with the audio track, but not to download to the computer, but move a step ahead and keep it in sync with the iPod. Curry needed an application that would control the various RSS feeds, withdrawing them and moved into his iPod [2].

After Adam Curry has published the source code of his application on the Internet, the programmers found many enthusiasts improved and publicized it. Curry's session in August 2004 is regarded as the emergence of podcasting. Of course, at that time an appropriate name for use of audio with the RSS was not selected, most people called it audio blogging.

Later, the name Podcasting emerged, combining two words "iPod" - digital music player from Apple in which audio files were played and "broadcasting" - (radio) broadcasts. The word Podcasting is derived from the words "pod" and "broadcast", where "pod" comes from iPod [3]. Despite the etymology, the content can be accessed using any computer that can play media files and not just portable music players. Use of the term "podcast" predates the addition of native support for Podcasting to the iPod, or to Apple's iTunes software.

III. PODCASTING TOOLS

To upload and record a podcast it requires a microphone and freely available software applications. These are the basics enough to create a simple podcast. If a podcaster would like to create a complexed podcast, a mixing desk that allows the podcaster to record several sounds and combine them is also needed. [4].

A. Software for creating and editing records

There are several programs for creating and editing podcasts. Some are difficult, in view of their operation, some are simpler. It is up to the user which program to choose. Among the most common tools for creating and editing audio are:

- Sound forge [5];
- Audio Hijack Pro [6];
- BIAS Peak [7], and
- CastBlaster [8].

B. Software for receiving podcasts

Apple has integrated Podcasting into the operating system. To register to a podcast and the subsequent management of its editions, the program iTunes is sufficient, which is available as standard in each installation. Receiving podcasts in Windows is not native, but it can be easily reached. Receiving podcasts under this operating system can be divided into two categories [9]:

- Programs that are installed on your computer download podcasts to a hard drive and as a subsidiary function typically include the possibility to transfer downloaded songs to a portable player.
- Programs that are installed directly on the player. They start automatically when connected to a PC, make use of the Internet and check sources of podcasts. If they find a new session, they download it directly to user's player.

Most of the most common players support this technology. Thanks to these programs, the files are automatically downloaded to the PC or a mobile player. Automation of this process distinguishes Podcasting from the common manual downloading of files from the Internet. This are the examples of these players [10]:

- iTunes;
- iPodderX;
- Juice;
- NewsFire;
- Winamp;
- myPodder, and
- Cloud Caster.

IV. PODCASTING AT STUDENT RADIO STATIONS ABROAD

The essential part of the analysis of the current state is to describe the ways how this problem can be solved abroad. For the needs of our work we looked for the best student radio stations rank in the USA. The list of the 20 best American student radio stations can be found at this website [11]. We have examined the individual websites of the university radio stations to find out how they podcast the programs [12].

Podcasting is used by the majority of these radio stations, because it is very common in the USA. The vast majority of US student radio stations distribute their podcasts exclusively through their Web portals without the use of external services. Their audio files - podcasts are streamed directly from their Web servers. Then we meet with another group of student radio stations, which share their programs on the Web portals for sharing audio files as Mixcloud or SoundCloud, and they can also stream podcasts on iTunes, the use of which is also very common in the USA.

Since 2005, the annual awards for podcasts are awarded on the initiative of Todd Cochran from the Podcast Connect Inc. The fans themselves can appreciate their favourite podcasters by nominating them into this competition. Nominated podcasts are divided into different categories, which arise from the most common nominations and belong

to the most listened types of podcasts. More than 600 podcasts have been nominated for the year 2016 already [13].

V. THE SITUATION IN THE CZECH REPUBLIC

Compared with Slovak podcasts in the Czech Republic, this service uses more radio stations. Among the first was the Czech Radio, which offers to its listeners so called Radio on Demand. It also offers a trailer for the podcasts in the form of video advertising. Besides Czech Radio podcasts offer also other radio stations: Radio Impuls, Express radio, Radio Frequency1 and radio Europe 2.

On the Czech websites, listeners can meet with other podcasts, which do not offer radio stations, but independent filmmakers. Examples include:

- brouzdej.cz - website where bloggers publish their blogs. It allows to set up voice output support. A blogger can choose if the notes will be read by male or female voice. When the blogger writes the contribution, after he/she send it online, it is converted into Waveform Audio File Format and saved to webhosted disk.
- respekt.cz - Respect Magazine offers users to download podcasts on their website. It offers storage space for audio recordings to each user. In case the user is interested to place a podcast in the magazine Respect, it is necessary to send the record to the editor by email.
- podcasting.rogner.cz - a website dedicated to podcasting. The user can find information about podcasting, information about the software, about systems etc. The author of the website, Roman Rogner, does not provide his own podcasts.

VI. THE SITUATION IN THE SLOVAK REPUBLIC

The first Slovak media which noticed Podcasting technology was FM Radio [14]. This third circuit of the public radio started podcasts on its website from 2006. Also Slovak Radio provides podcasts and shows all its circuits in the form of podcasts.

There are not so many podcasts which create an independent Slovak podcasters as in other countries. Websites with podcasts include:

- niemand.sk - the first Slovak podcast, whose author is Thomas Ulej. It was established in 2005 and listeners can find on this website particular recording of literature. One of the attractions is the use of the voice of P. O. Hviezdoslav. The used format of podcasts is MP3. Update of recordings is not regular, as the recording is mainly occasional.
- radioarwie.szm.sk - Internet radio, which was created in December 2005 with an irregular broadcast. Broadcasting in the form of podcast began at the end of March 2006. The listeners will also find on the website information about podcasting, programs, user manual for location RSS feed to iTunes and so on.

- gpkava.sk – podcast about coffee. Podcast dedicated to the forthcoming championship of Slovakia in the preparation of coffee in Aeropress.

VII. PODCASTING AND RADIO STUDIO OF ZILINA UNIVERSITY

Radio studio of Zilina University is a non-profit organization, where students of the University of Zilina are also involved in the operational process. They can acquire knowledge and develop their skills during broadcasting in three possible areas: moderation, broadcasting technology, or music area. These can also help them in their future career after graduating from university.

“RAPEŠ” radio studio, the only college radio studio in Slovakia, broadcasts 24 hours a day. During the term, listeners can listen to moderated broadcast from Monday to Thursday, from 18:00 to midnight. Except for NONSTOP, which is broadcast once a term for one week. Rapeš radio studio broadcasts universal programs from the world of music, music genres, Slovakia and Czech productions, through programs on current topics of everyday life as well as events at University, to programs in which listeners can win valuable prizes.

The main aim of this paper was to design and present the podcasts for radio station of the University of Zilina. The significant part of this work was to determine the students' interest and the usage of podcasts on the website of the radio. To clarify the main aim, we selected a number of partial objectives. The first partial objective was to analyse the need for the creation of this service among students. We were trying to find out the attitude of students, their interests and the views on the creation of podcasts.

Since Rapeš broadcasts many programs, we wanted to find out which of them would be welcomed by the listeners as podcasts on the website of Rapeš. On this basis, we developed a questionnaire, through which we also wanted to find out whether respondents are familiar with with the Podcasting service and what the conditions to use it are.

A questionnaire was used. We contacted 100 respondents, both men and women studying at different faculties of the University of Zilina aged 19-30 years. Response rate was 100%; all questionnaires were useful for our research. In the research component, the proportion of men and women was 59% and 41%.

From the respondents 45% are familiar with the Podcasting. Conversely, 55% of respondents do not know or are not familiar with this concept. It shows us that Podcasting has not yet got into the consciousness of the wider public.

Although a number of respondents are familiar with podcasting, it is used by only 21%, which shows us that they were not impressed by this service or are not familiar with such content that would interest them enough to download it through podcasts.

Technical equipment of people is sufficient, since 98% of respondents own a certain type of MP3 player. 39% own a portable music player, iPod. Probably for this reason, most of the respondents use iTunes, 48%. Only 5% use iPodder, despite the fact that it was the first program which could

download podcasts. 33% of respondents use Winamp, and it is also the most commonly used music player on the PC. 14% use other programs to download podcasts.

Although 62% of respondents do not know which program they would welcome as a podcast or podcasts on the website Rapeš (Figure 1), 38% of respondents could imagine podcasts of some programs. 12% wished “Album of the week”, because they are interested in which artist released a new album. 9% would like to download “Cinema life” because they are interested in movie news and reviews. 8% are interested in competition and therefore would like to download the program “Not to drown”.

Based on the received information about Podcasting service, we drew up a service proposal for radio studio Rapeš. The selection of programs was affected by the evaluation of questionnaire survey. The greatest interest had “Album of the week” and programs “Cinematiclife”, and “Not to drown”.

Characteristics of Podcasting programs:

- Album of the week - a regular program in which the moderator presents the current album, which he/she considers as interesting, or special.
- Cinematiclife - Movie news, reviews and highlights from the show business. Listeners will learn current information from the world of film and can enter the competition to win free tickets to the cinema.
- Not to drown - entertainment program in which two guests compete. Moderator prepares for them three competition rounds, and competitors try not to "drown" in the questions.

After the selection of the program, the moderators were acquainted with the fact that their program will be recorded and subsequently placed on the website. There was also indispensable cooperation of technicians who are in charge of the recording of such programs. Programs were saved in MP3 format, which is the most commonly used format of audio files placed on the Internet.

After obtaining the recorded program we contacted the webmaster who placed this program on the website. Webmaster realized the proposal and created a Podcasting service on the Radio Rapeš website. He created the username and password for us in the CMS, from where the website is administrated. On this basis, we can add a recorded program on a page.

Programs will be updated each week during the moderated broadcast of the radio station Rapeš. At the time the program is not broadcast, the last programs remain available as podcasts. Gradually, we will develop podcasts of other programs.

VIII. CONCLUSION

There is a number of quality radio stations that could use Podcasting and enable their programs to be listened also after live broadcasting. At the same time, by provision of this service they could increase visits of their websites, as it was confirmed by FM radio after releasing the Podcasting service. From the survey, conducted on the potential users of the Podcasting service, came out that users have good

assumptions to use this service because they are technically skilled and open to new ideas.

We were able to meet the aim of the research upon the analysis of existing technologies and used tools, and upon the survey among target customers – students, we designed a podcast for the radio station of the University of Žilina.

As the next step, it will be necessary to examine the benefits and failings of our proposed solutions, the impact on the mentioned programs, and to propose any corrections, if necessary.

REFERENCES

[1] G. Colombo, "Absolute Beginner's Guide to Podcasting.", Que Publishing, Toronto 2006.

[2] J. Farkas, G. Bart, "Secrets of Podcasting: Audio Blogging for the Masses", Peachpit Press, Berkeley 2005.

[3] "Oxford Dictionaries Online — podcast", oxforddictionaries.com, [retrieved: May, 2016]. Available from: <http://www.oxforddictionaries.com/definition/english/podcast>.

[4] W. Geoghegan, D. Klass, "Podcast solution – The Complete Guide of Podcasting", Springer-Verlag New York, Inc., 2005.

[5] Sound Forge software page, [retrieved: May, 2016]. Available from: <http://www.sonycreativesoftware.com/soundforgesoftware>.

[6] Audio Hijack Pro page, [retrieved: May, 2016]. Available from: <https://rogueamoeba.com/udiohijackpro/>.

[7] Bias software, [retrieved: May, 2016]. Available from: <http://www.bias-inc.com/downloads/updates/>.

[8] CastBlaster software page, [retrieved: May, 2016]. Available from: <http://www.castblaster.com/>.

[9] R. Williams, "Podcasting and Blogging with GarageBand and iWeb", Peachpit Press, Berkeley 2006.

[10] A. Jelemensky, "Podcast – new digital medium or just a fun?" Available from: <http://www.zive.sk/default.aspx?article=262982>, [retrieved: May, 2016].

[11] Best college reviews, [retrieved: May, 2016]. Available from: <http://www.bestcollegereviews.org/>.

[12] "These 20 College Radio Stations Rock", Available from: <http://www.bestcollegereviews.org/these-20-college-radio-stations-rock/>, [retrieved: May, 2016].

[13] 11th Podcast Awards Winner Announcement, [retrieved: May, 2016]. Available from: <http://www.podcastawards.com/>.

[14] L. Kocisek, "Slow fenomen – podcasting", Etrend, may 2006, Available from: <http://medialne.etrend.sk/radia/clanok.php?clanok=1579>, [retrieved: May, 2016].

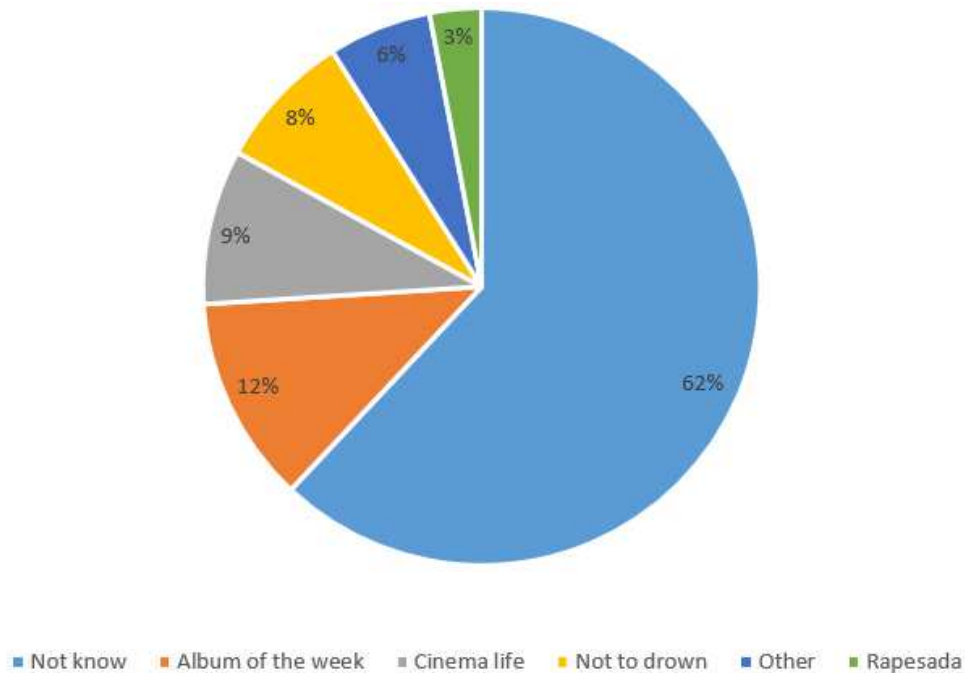


Figure 1. Program that respondents would welcome as a podcast